




Code	Type	Plate Thickness	Material
OBG01	Flat Head Countersunk Screw Hole	3	High Tensile Brass Alloy (SP2) Solid Lubricant Embedded (Graphite)
OBG02		5	
OBG11	Low Head Screw Hole	5	
OBG12		10	

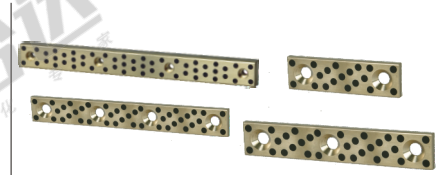


OBG01
(Plate Thickness 3mm)




OBG02
(Plate Thickness 5mm)




OBG11
(Plate Thickness 5mm)

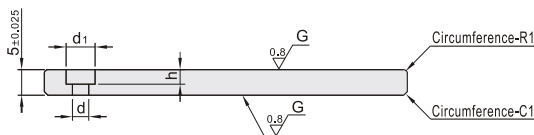


OBG12
(Plate Thickness 10mm)

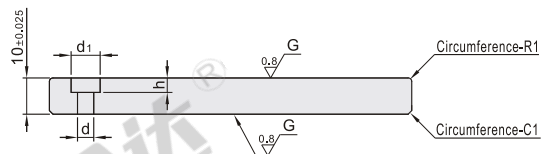


1K(1-Hole Type)




2K(2-Hole Type)




3K(3-Hole Type)




4K(4-Hole Type)




5K(5-Hole Type)




4K(4-Hole Type)




6K(6-Hole Type)



8K(8-Hole Type)

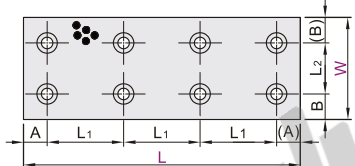

10K(10-Hole Type)

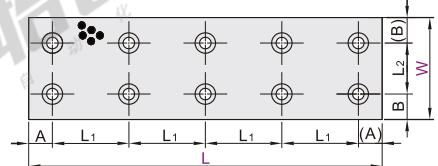

① OBG11 is applicable to W dimension 20mm only.


② Only () marked L dimensions are available for OBG01.

Part Number		W	L	Mounting Hole Qty.	Hole Position	A	L ₁	B	L ₂
Code									
Flat Head Countersunk Screw Hole (Plate Thickness 3 mm) OBG01	20	(30)	1	1	—	—	—	—	—
		(40)				20			
		(50)	2			30			
		(60)				40			
		80			10	60			
	30	100				40			
		120	3			50			
		150				65			
		200	4			60			
		250			13	56			
(Plate Thickness 5 mm) OBG02	30	300	5		14	68			
		(30)	1		—	—			
		(40)				20			
		(50)	2			30			
		(60)				40			
	40	80			10	60	—	—	
		100				40			
		120	3			50			
		150				65			
		200	4			60			
Low Head Screw Hole (Plate Thickness 5 mm) OBG11	30	250	5		13	56			
		300			14	68			
		(40)	1		—	—			
		(60)	2			40			
		80			10	60			
	40	100				40			
		120	3			50			
		150				65			
		200	4			60			
		250			13	56			
(Plate Thickness 10 mm) OBG12	40	300	5		14	68			
		(40)	1		—	—			
		(60)	2			40			
		80			10	60			
		100				38			
	50	120	3			48			
		150				63			
		200	4			58			
		250			13	56			
		300	5		14	68			

Part Number		W	L	Mounting Hole Qty.	Hole Position	A	L ₁	B	L ₂
Code									
Flat Head Countersunk Screw Hole (Plate Thickness 5 mm) OBG02	50	50	1	1	—	—	—	—	—
		60				40			
		80	2		10	60			
		100				37			
		120	3			47			
	60	150			13	62			
		200	4			58			
		250				56			
		300	5		14	68	—	—	
		300			10	40			
Low Head Screw Hole (Plate Thickness 10 mm) OBG12	60	80	2		10	60			
		100				37			
		120	3			47			
		150			13	62			
		200	4			58			
	80	250	5			56			
		300			14	68			
		80	4		10	60			
		100				74			
		120				47			
Double Row	80	150	6		13	62	20	40	
		200				87			
		250	8		14	74			
		300	10			68			


Hole Machining Details

OBG01 (Hex Socket Flat Head Cap Screw)




W	d	d ₁	h	Screw Specifications
20	4.3	9.5	2.5	M4-20
30	5.3	11.1	2.8	M5-20
40				

OBG11 (Hex Socket Extra Low Head Cap Screw)




W	d	d ₁	h	Screw Specifications
20	4.3	8	3	M4-10

OBG02 (Hex Socket Flat Head Cap Screw)



W	d	d ₁	h	Screw Specifications
20	4.3	9.5	2.5	M4-20
30	5.3	11.1	2.8	M5-20
40	6.5	13.1	3.3	M6-20
50				
60	8.5	17.6	4.3	M8-20
80				

OBG12 (Hex Socket Extra Low Head Cap Screw)



W	d	d ₁	h	Screw Specifications
20	4.3	8	4.2	M4-20
30	5.3	9.5	5.2	M5-20
40	6.5	11	6.2	M6-20
50				
60	8.5	15	6.2	M8-20
80				

① Screws need to be purchased separately.



Please order as shown

Part Number		W	L
Code			
OBG01	20	(30)	
OBG02	20	(40)	

OBG01—W20—L30



Discount price	
Per	1~9 10~
Price	100% Additional quotation



Delivery	
	8