


Oil Free Slide Plates

Dimension Selectable Copper Alloy


Flat Head Countersunk Screw Hole

Code	Type	Material
OBJ01	Dimension Selectable	Flat Head Countersunk Screw Hole High Tensile Brass Alloy(SP2) Solid Lubricant Embedded (Graphite)




Thread Locking Treatment


- The threads are coated with special resin which excels in elasticity, abrasion and oil resistance.
- Thread locking will begin to lose its effectiveness gradually after the fourth use.




2K(2-Hole Type)




3K(3-Hole Type)




4K(4-Hole Type)



6K(6-Hole Type)



Applicable Screw: Hex Socket Flat Head Cap Screw Slide Direction



Thread Locking Compound

Screws need to be purchased separately.

The first perspective

Code	W	L	Mounting Hole Type	L1	L2
OBJ01	28	50	2K	20	
		75		45	
		100		70	
	38	50	3K	20	
		75		45	
		100		70	
	48	50	4K	20	
		75		45	
		100		70	
	75	50	6K	20	
		75		45	
		100		70	



Part Number	W	L
OBJ01	28	50
		75



OBJ01 — W28 — L50

Per	1~9	10~
Price	100%	Additional quotation


8

Low Head Screw Hole

Code	Type	Material
OBJ11	Dimension Selectable	Low Head Screw Hole High Tensile Brass Alloy(SP2) Solid Lubricant Embedded (Graphite)

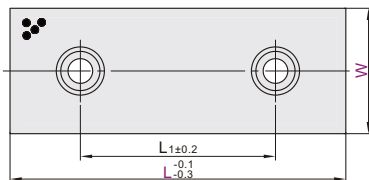

Applicable Screw: Hex Socket Low Head Cap Screw



Screws need to be purchased separately.

The first perspective

Code	W	L	L1
OBJ11	28	75	45
		100	50
		125	75
	38	75	45
		100	50
		125	75
	48	75	45
		100	50
		125	75
	58	75	45
		100	50
		125	75



Part Number	W	L
OBJ11	28	75
		100

OBJ11 — W28 — L75

Per	1~9	10~
Price	100%	Additional quotation

8