

# Flange, I.D. F7 O.D. h7

Special Copper Alloy

# Oil-Free Bushings




Code	Type	Material	I.D. (Tol.)	O.D. (Tol.)	Allowable Temperature
OFG61	Round Flange	Special copper alloy	F7	h7	-30 ~ 150°C
OFG65	Compact Flange				

- High speed and light load (under oil supply conditions).
- The shaft diameter tolerances that match this product are: f8, g6 (for reference only).
- When the product is pressed into the seat hole, put on a little lubricating oil on the end or inner wall of the seat hole, and use a hydraulic press or vise to slowly press it into the seat hole. Do not hit the product hard to avoid deformation of the product.

Round Flange  
OFG61

Compact Flange  
OFG65

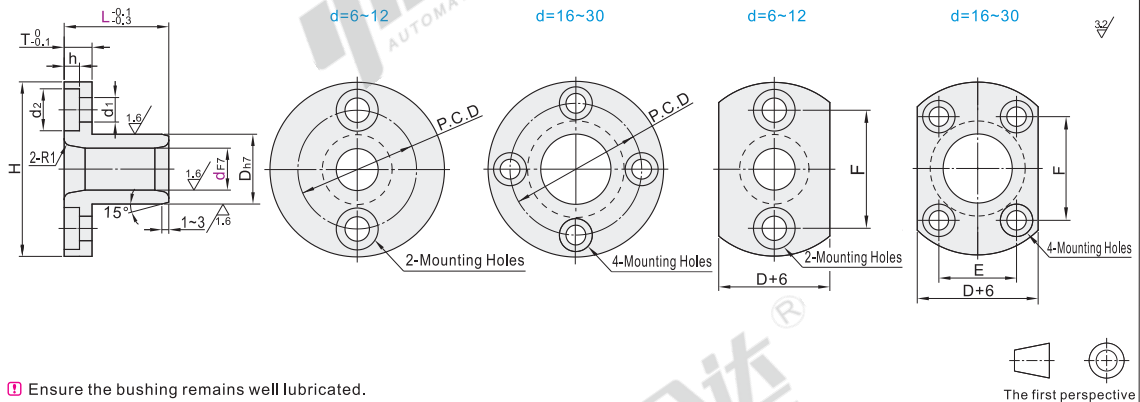

Ensure the bushing remains well lubricated.

Part Number		L										D <sub>h7</sub>	H	T	d <sub>1</sub>	d <sub>2</sub>	h	P.C.D	E	F	Applicable Hex Socket Low Head Cap Screws		
Code	d <sub>F7</sub>																						
Round Flange OFG61	6	+0.022 +0.010	15	20								10	0 -0.015	25						17		17	
	8	+0.028 +0.013	15	20	25	30					12	0 -0.018	27	4	3.3	6	2.3	19		19	M3×10(2 pcs)		
	10		20	25	30	35					14	0 -0.018	29					21		21			
	12	+0.034 +0.016	20	25	30	35	40					18	0 -0.021	36	5	4.3	7.5	3	26		26	M4×12(2 pcs)	
Compact Flange OFG65	16		25	30	35	40	50					22	0 -0.021	40				30	18	24	M4×12(4 pcs)		
	20		25	30	35	40	50	60					28	0 -0.025	49	6	5.3	9	3.7	38	22	31	M5×16(4 pcs)
	25	+0.041 +0.020	30	35	40	50	60	70					33	0 -0.025	54				43	25	35		
	30		30	35	40	50	60	70					38	0 -0.025	63	8	6.3	11	4.3	50	30	40	M6×20(4 pcs)

Screws need to be purchased separately.



Part Number		L			
Code	d				
OFG61	6	15	20		
OFG65	8	15	20	25	30

OFG61 - d6 - L15



Discount price	
Per	1~19 20~
Price	100% Additional quotation



Delivery	
8	

