

Straight Type Oil-Free Bushings

◀ I.D. E7 O.D. r6

Standard / Thin Wall, Copper Alloy

Code	Type		Material	I.D. (Tol.)	O.D. (Tol.)
OFK02	Straight	Standard	High Tensile Brass Alloy(SP2)	E7	r6
OFL02		Thin Wall	Solid Lubricant Embedded(Graphite)		




Features

- Self-lubricating, maintenance-free, with a stable low friction coefficient under heavy load and low-speed movement.
- Excellent wear-resistance, applicable for linear and rotary movement.
- High and low temperature resistance, strong impact resistance.


ⓘ The shaft diameter tolerances that match this product: d8 heavy load, e7 light load, g6 high precision(for reference only).

ⓘ When the product is pressed into the seat hole, put on a little lubricating oil on the end or inner wall of the seat hole, and use a hydraulic press or vise to slowly press it into the seat hole. Do not hit the product hard to avoid deformation of the product.


Standard
OFK02



Detail of A (Both Sides)



Thin Wall
OFL02

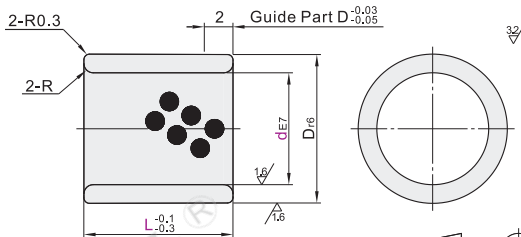

The first perspective

ⓘ The Tolerance of housing diameter matching with this product: H7 (for reference only).

Part Number		L								OFK02			OFL02			
Code	dE7									D16	R	D16	R			
Standard OFK02	5	+0.032	8	10	12	15	16	20	9	+0.028	7	0.5	7	0.3		
	6	+0.020	8	10	12	15	16	20	25	10	+0.019		8		10	+0.028
	8	+0.040	8	10	12	15	16	20	25	12	+0.034		10		12	+0.019
	10	+0.025	8	10	12	15	16	20	25	30	14		+0.023		12	15
Thin Wall OFL02	12	+0.050	8	10	12	15	16	20	25	30	18	+0.023	15	18	+0.023	
	15	+0.032	10	12	15	16	20	25	30	40	21	+0.041	18	20	+0.041	
	16	+0.032	10	12	15	16	20	25	30	40	50	22	+0.028	20	24	+0.028
	20	+0.061	15	16	20	25	30	40	50	28	+0.034	24	28	+0.041		
	25	+0.040	15	16	20	25	30	40	50	33	+0.050	29	34	+0.028		
	30	+0.040	15	16	20	25	30	40	50	38	+0.034	34	38	+0.050		



Part Number		L
Code	d	
OFK02	5	8 10
OFL02	6	8 10

OFL02—d5—L10



Discount price	
Per	1~29 30~
Price	100% Additional quotation



Delivery
8

