


Cable Carriers/Mounting Brackets

Cost-effective Type·15 series·Inner Radius Insert/Outer Radius Insert
For General Use Miniature (Bridge Type)

Cable Carriers

Code	Type	Inner Height	Cable Insertion Type	Beam	Number of Cavities	Material	Color	Allowable Temperature	Flammability Standard
VB02 VB04	For General Use	15	Inner Radius Insert Outer Radius Insert	Bridge	Single Cavity	Engineering Plastic	Black	-20°C~100°C	UL94-HB

The standard part number of this series includes a set of mounting brackets(one each for the moving end and the fixed end).

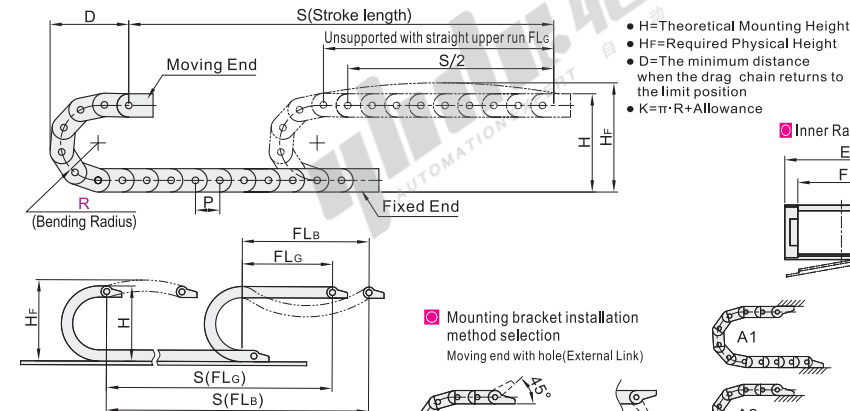

Unsupported Length
FLG=Unsupported with straight upper run
FLB=Unsupported with permissible sag

Number of chain links per meter=1000÷Pitch P


This product has free combination of 4 assembly methods to meet various installation situations. The first perspective

Part Number Code	Bending Radius R	No. of Links N	Mounting Brackets	G	T	F	E	Pitch P	Mounting Dimensions H D K	Hr Required Physical Height	Max. Cable Dia.	Max. Load (kg/m)	Max. Permissible Sag Length (m)	Weight (kg/m)
VB02 VB04	28					15	26.2		76 88 188	96				≈0.26
	38								96 98 219	116				
	48								116 108 251	136				
	28								76 88 188	96				
	38					20	31.2		96 98 219	116				≈0.27
	48								116 108 251	136				
	28								76 88 188	96				
	38					25	36.2		96 98 219	116				
	48								116 108 251	136				≈0.30
	28					30	41.2		96 98 219	116				
	48								116 108 251	136				
	28					38	49.2		96 98 219	116				
VB02 VB04	48								116 108 251	136				≈0.32
	28					50	61.2		96 98 219	116				
	48								116 108 251	136				
	48								116 108 251	136				


Mounting Brackets

Code	Type	Comb Teeth	Material	Color	Allowable Temperature	Flammability Standard
VEY02	For 15 Series Cable Carriers	Have	Engineering Plastic	Black	-20°C~100°C	UL94-HB


No. : 1515/1520

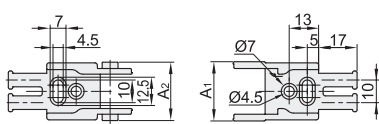


No. : 1525/1530



No. : 1538

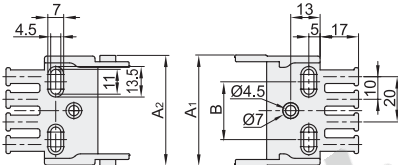

No. : 1550

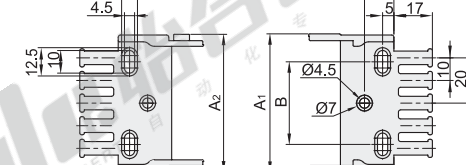

The first perspective

Part Number Code	Inner Width	A1	A2	B	Number of Comb Teeth	Applicable Cable Carriers
VEY02	15	26.2	25.8		2	VB02-1515/VB04-1515
	20	31.2	30.8		2	VB02-1520/VB04-1520
	25	36.2	35.8		3	VB02-1525/VB04-1525
	30	41.2	40.8	16.5	3	VB02-1530/VB04-1530
	38	49.2	48.8	25.5	4	VB02-1538/VB04-1538
	50	61.2	60.8	36.5	5	VB02-1550/VB04-1550



Part Number Code	Inner Width	A1	A2	B	Number of Comb Teeth	Applicable Cable Carriers
VB02-1515	15	26.2	25.8		2	VB02-1515
VB02-1520	20	31.2	30.8		2	VB02-1520
VB02-1525	25	36.2	35.8		3	VB02-1525
VB02-1530	30	41.2	40.8	16.5	3	VB02-1530
VB02-1538	38	49.2	48.8	25.5	4	VB02-1538
VB02-1550	50	61.2	60.8	36.5	5	VB02-1550

Part Number Code	Inner Width	A1	A2	B	Number of Comb Teeth	Applicable Cable Carriers
VEY02	15	26.2	25.8		2	VEY02-1515
VEY02	20	31.2	30.8		2	VEY02-1520
VEY02	25	36.2	35.8		3	VEY02-1525
VEY02	30	41.2	40.8	16.5	3	VEY02-1530
VEY02	38	49.2	48.8	25.5	4	VEY02-1538
VEY02	50	61.2	60.8	36.5	5	VEY02-1550

