

X-Axis, Standard ▶ Rack & Pinion Feed

Economy Dovetail Slide Stages




Positioning Stages


Code	Type		Drive Direction	Material		Surface Treatment
				Main body	Rack	
E-EIL01	Rack & Pinion Feed	Standard	X-Axis	Aluminum Alloy	Brass	Black Anodize

① When the flatness of the parts installed on the bottom or top of the sliding table is insufficient, they may not give full play to the due performance of the product (flatness reference standard: Within 10μm).


No.: 50

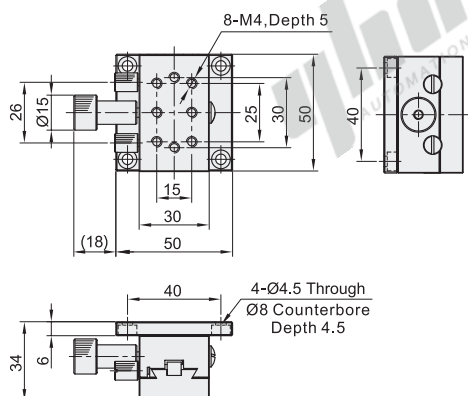



No.: 60

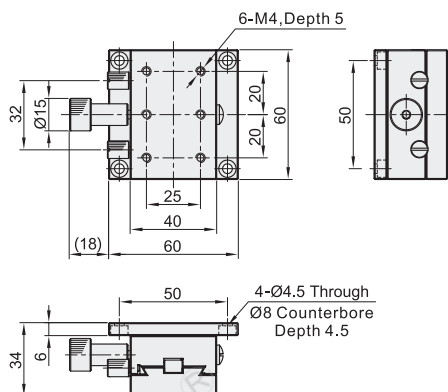

No.: 90

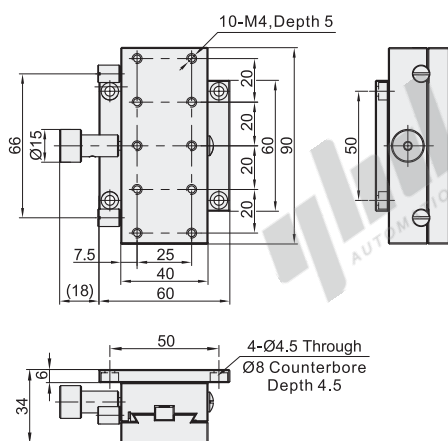

No.: 126

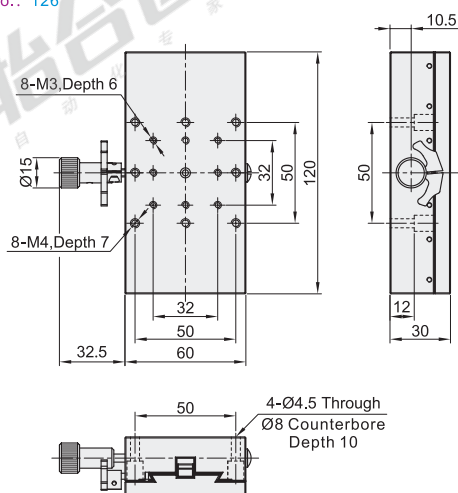

The first perspective

Part Number		Stage Surface (mm)	Drive Position	Travel Distance (mm)	Minimum Graduation (mm)	Parallelism (μm)	The amount of movement for one turn of the knob (mm)	Load Capacity (kgf)	Body Weight (kg)
Code	No.								
E-EIL01	50	30×50	Side	±16	0.1	40	18	3	0.12
	60	40×60		±21				4	0.29
	90	40×90		±35					0.41
	126	60×120		±50				5	1



Please order as shown

Part Number		Stage Surface (mm)
Code	No.	
E-EIL01	50	30×50
E-EIL01	60	40×60
E-EIL01	90	40×90

E-EIL01 — 60