


Economy Dovetail Slide Stages

◀ XY-Axis, Thin
Rack & Pinion Feed

Positioning Stages





Code	Type		Drive Direction	Material		Surface Treatment
				Main Body	Rack	
E-EIL36	Rack & Pinion Feed	Thin	XY-Axis	Aluminum Alloy	Brass	Black Anodize



① When the flatness of the parts installed on the bottom or top of the sliding table is insufficient, they may not give full play to the due performance of the product (flatness reference standard: Within 10μm).

No.: 50

No.: 60

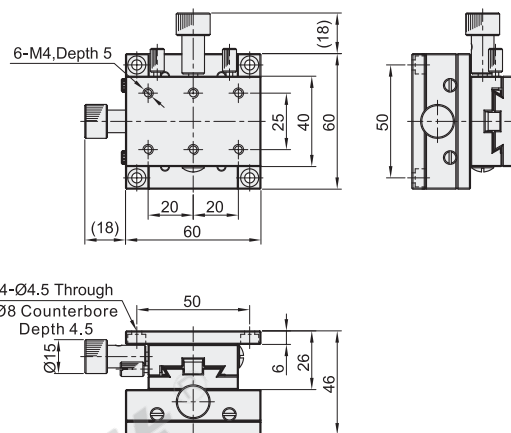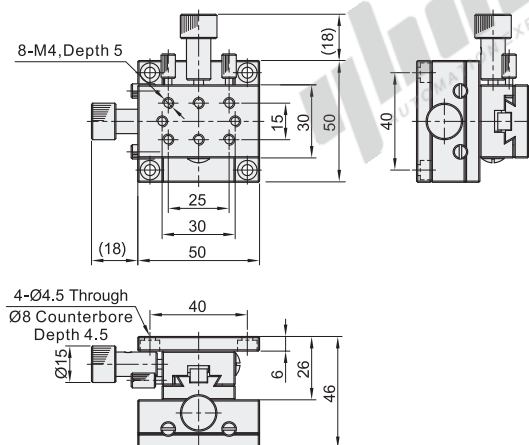

No.: 90

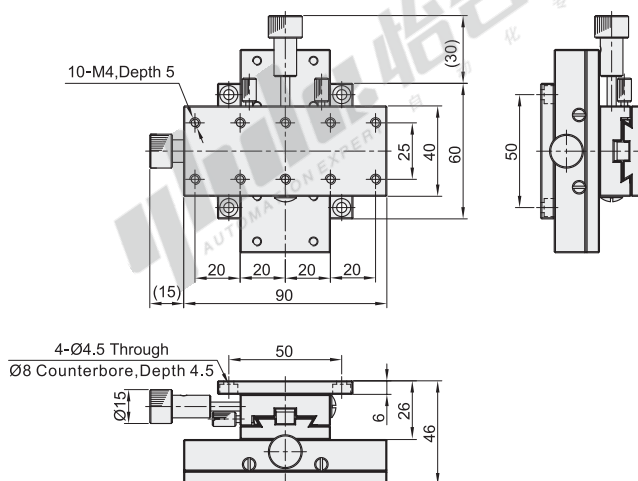

The first perspective

Part Number		Stage Surface (mm)	Travel Distance (mm)	Minimum Graduation (mm)	Parallelism (μm)	The amount of movement for one turn of the knob (mm)	Load Capacity (kgf)	Body Weight (kg)
Code	No.							
E-EIL36	50	30×50	±15				1.5	0.23
	60	40×60	±21	0.1	80	18		0.56
	90	40×90	±35				2.5	0.81



Please order as shown

Part Number		Stage Surface (mm)
Code	No.	
E-EIL36	60	40×60
E-EIL36	90	40×90

E-EIL36 — 60