


Dovetail Groove Stages

XY-Axis


High Precision, Feed Screw

Code	Type	Drive Direction	Material	Surface Treatment
EJK01	Feed Screw	XY-Axis	Copper Alloy	Black Fluoro Resin
EJK02			Aluminum Alloy	Black Anodize


① When the flatness of the parts installed on the bottom or top of the sliding table is insufficient, they may not give full play to the due performance of the product (flatness reference standard: Within 10μm).



No.: 25

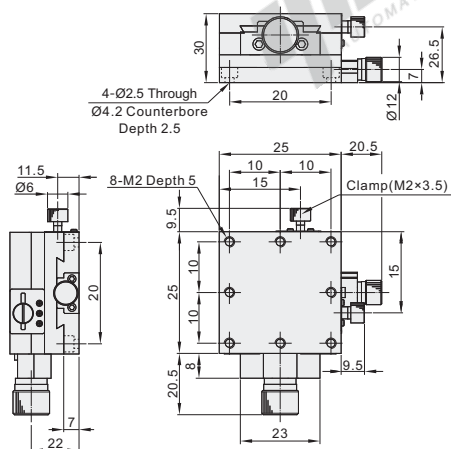


No.: 40

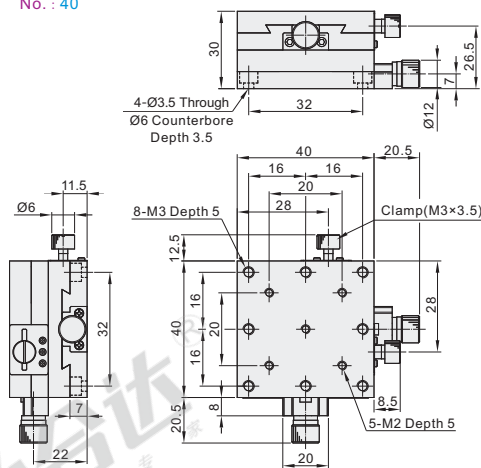

② EJK02-40 without central threaded hole.

No.: 60

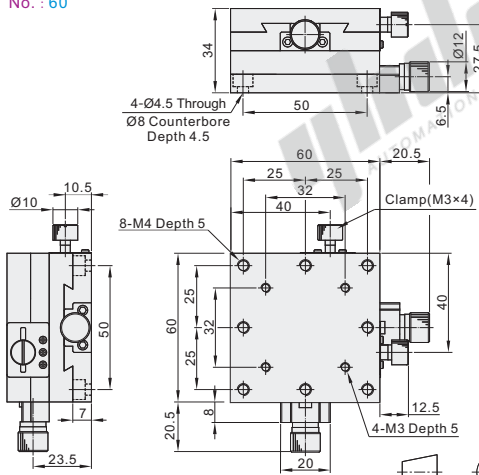

Optional Processing

Code	Spec.
QL	Locking knob and screw orientation changed to the same direction (down and left) Ordering Code QL
QR	Locking knob and screw orientation changed to the same direction (down and right) Ordering Code QR

The first perspective

Part Number	Stage Surface	Travel Distance	Minimum Graduation	Travel per Rotation	Load Capacity	Travel Accuracy	Moment Load Capacity (N·cm)	XY-Axis Orthogonality	Body Weight	Accessories (4 pcs)
Code	No.	(mm)	(mm)	(mm)	(N)	Straightness (μm)	Pitching Yawing Rolling	(μm)	(kg)	Hex Socket Head Cap Screw (Stainless Steel)
EJK01 EJK02	25	25×25	±5		28.4		1.3 1.5 1.3		0.15	TAC21-M2-L8
	40	40×40	±7	0.1	27.4	30	3 3 3	70	0.38	TAC21-M3-L6
	60	60×60	±9		33.3		4 4 4		1.2	TAC21-M4-L6

③ Optional Processing



Please order as shown

Part Number		Stage Surface (mm)
Code	No.	
EJK01	25	25×25
EJK02	40	40×40

EJK01—25

EJK01—25

Part Number		Optional Processing Code
Code	No.	
EJK01	25	QL QR
EJK02	40	

EJK01 — 25 — QL

EJK01—25—QL





Discount price

Per	1~9	10~
Price	100%	Additional quotation

