

X-Axis, Pitch 0.8/4.0 mm ▶

High Precision, Feed Screw

Dovetail Groove Stages

Positioning Stages




Code	Type	Drive Direction	Pitch	Material	Surface Treatment
EJK11	Feed Screw	X-Axis	4.0	Aluminum Alloy	Black Anodize
EJK12			0.8		

① When the flatness of the parts installed on the bottom or top of the sliding table is insufficient, they may not give full play to the due performance of the product (flatness reference standard: Within 10μm).



No. : 40

No. : 60

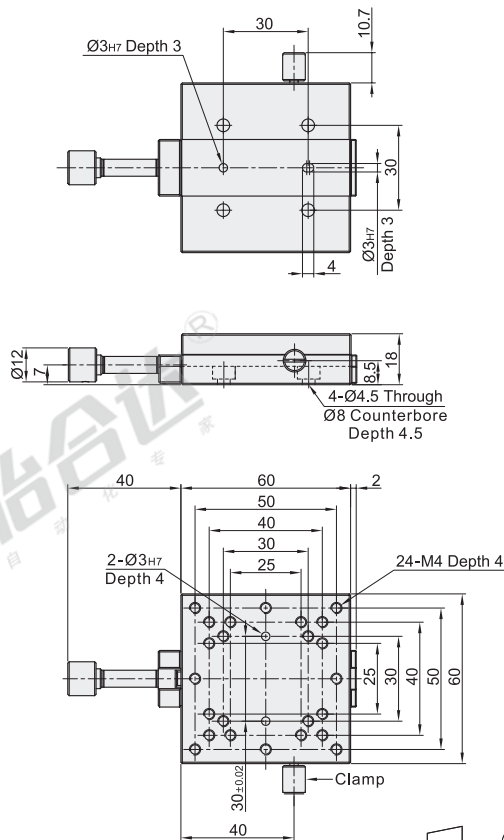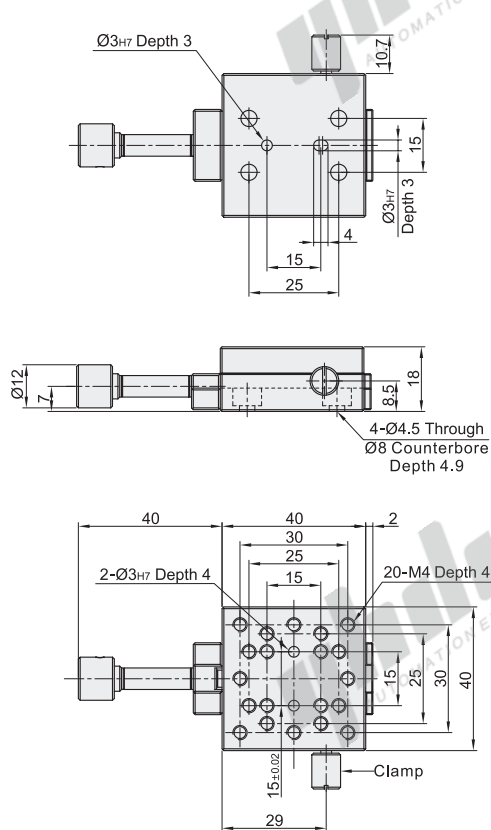

Part Number		Stage Surface	Travel Distance	Minimum Graduation	Load Capacity(N)		Travel Accuracy(μm)		Body Weight	Accessories(4 pcs)
Code	No.	(mm)	(mm)	(mm)	Horizontal	Vertical	Straightness	Parallelism	(kg)	Hex Socket Head Cap Screw (Stainless Steel)
EJK11	40	40×40	±11	0.1	19.6	9.8	20	30	0.1	TAC21-M4-L5
EJK12	60	60×60	±21		29.4	14.7			0.19	



Part Number	
Code	No.
EJK11	40
EJK12	60

EJK11—40

Optional Processing

Part Number		Optional Processing
Code	No.	Code
EJK11	40	QR
EJK12	60	

EJK11—40—QR



Code	QR
Feed screw position change: Right side	
Ordering Code	QR
Spec.	



Discount price	
Per	1~9
Price	100%



Delivery	
Per	10~
Price	Additional quotation

6