



Code	Type	Drive Direction	Material	Surface Treatment
EJL01	Feed Screw	Z-Axis	Copper Alloy	Black Fluoro Resin

① When the flatness of the parts installed on the bottom or top of the sliding table is insufficient, they may not give full play to the due performance of the product (flatness reference standard: Within 10μm).


No.: 25

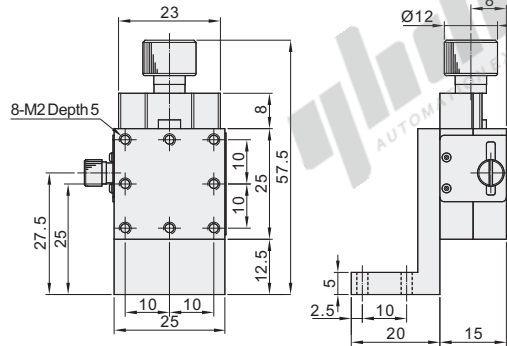

No.: 60

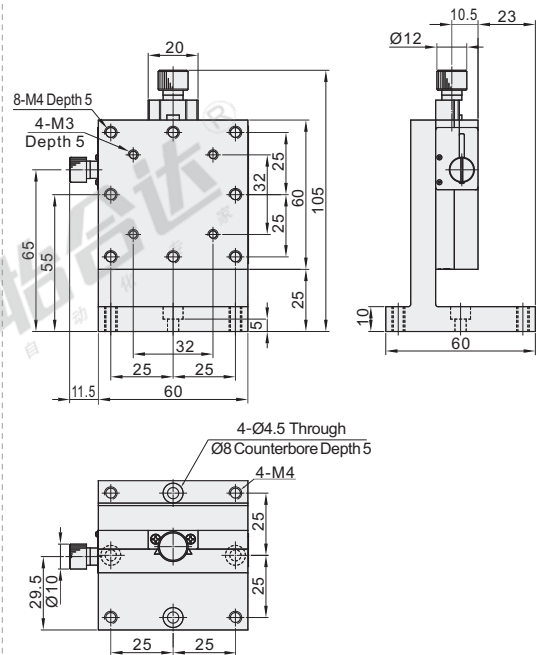

No.: 40

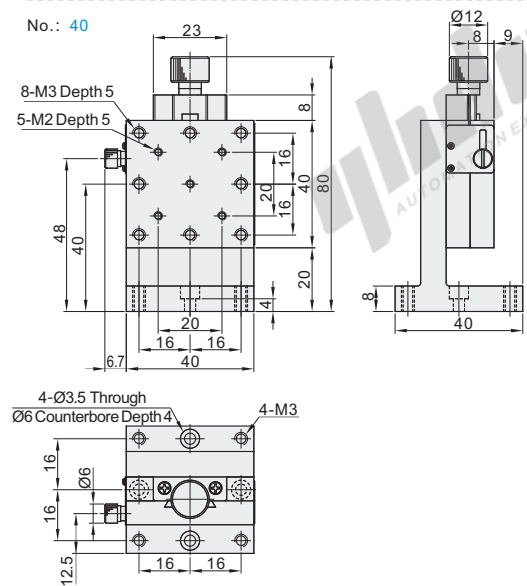

Part Number		Stage Surface (mm)	Travel Distance (mm)	Minimum Graduation (mm)	Travel Accuracy (Straightness) (μm)	The amount of movement for one turn of the knob (mm)	Load Capacity (kgf)	Body Weight (kg)
Code	No.							
EJL01	25	25×25	±3				1.0	0.09
	40	40×40	±7	0.1	30	0.5	1.0	0.26
	60	60×60	±9				2.0	0.75



Part Number		Stage Surface (mm)
Code	No.	
EJL01	25	25×25
	40	40×40

EJL01—25



Discount price	
Per	1~9 10~
Price	100% Additional quotation



Delivery
10