

Dovetail Groove Stages

Z-Axis


High Precision, Rack & Pinion Feed




Code	Type	Drive Direction	Material		Surface Treatment
			Main body	Rack	
EJQ01	Rack & Pinion Feed	Z-Axis	Aluminum Alloy	Brass	Black Anodize

① When the flatness of the parts installed on the bottom or top of the sliding table is insufficient, they may not give full play to the due performance of the product (flatness reference standard: Within 10μm).


No.: 40

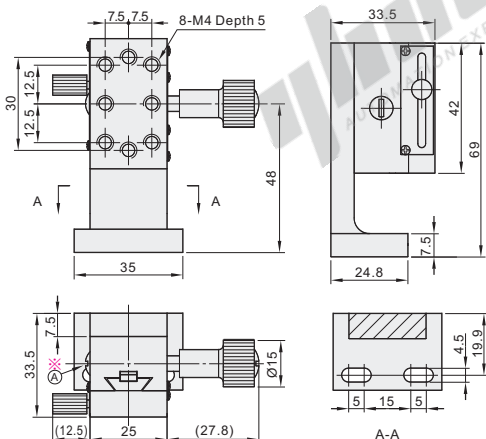


No.: 90

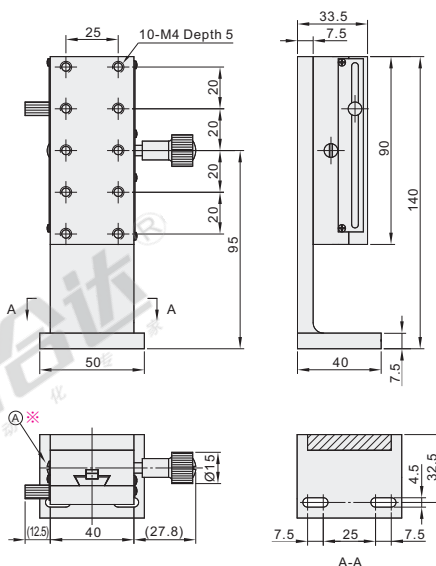

No.: 60

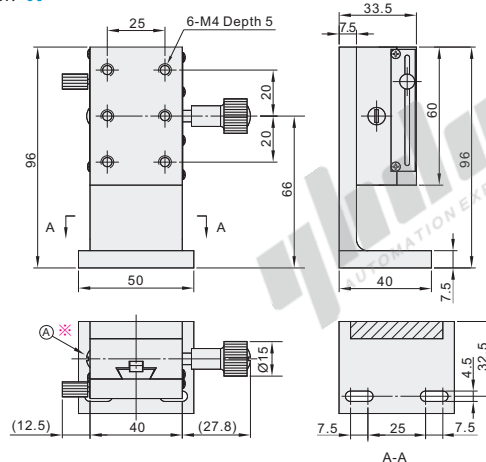

※By turning the preload adjustment screw (A) clockwise with a flathead screwdriver, the stage slides slowly, and by turning counterclockwise the stage slides quickly and smoothly.



The first perspective

Part Number		Stage Surface (mm)	Travel Distance (mm)	Minimum Graduation (mm)	Travel Accuracy (Straightness) (μm)	The amount of movement for one turn of the knob (mm)	Load Capacity (kgf)	Body Weight (kg)
Code	No.							
EJQ01	40	25×42	±12				1.5	0.17
	60	40×60	±21	0.1	30	18	2.0	0.33
	90	40×90	±35					0.45



Please order as shown

Part Number		Stage Surface (mm)
Code	No.	
EJQ01	40	25×42
	60	40×60

EJQ01-40



Discount price	
Per	
1~9	10~
Price	100% Additional quotation



Delivery	
10	