




High Precision, Long Stroke, Rack & Pinion Long Stroke

 X-Axis

Code	Type	Drive Direction	Main body Material	Rack Material	Surface Treatment
EJR01	Rack & Pinion Long Stroke	X-Axis	Aluminum Alloy	Brass	Black Anodize

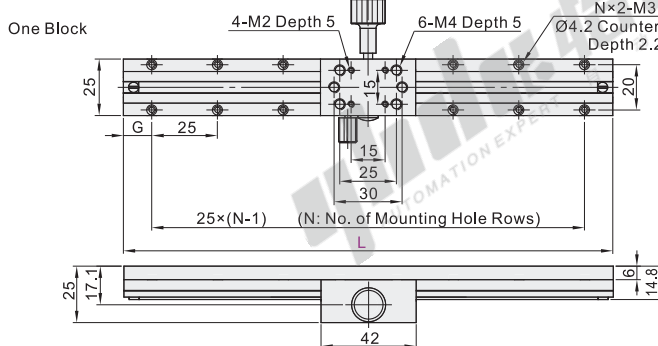


! When the flatness of the parts installed on the bottom or top of the sliding table is insufficient, they may not give full play to the due performance of the product (flatness reference standard: Within 10µm).




The first perspective

Two Blocks

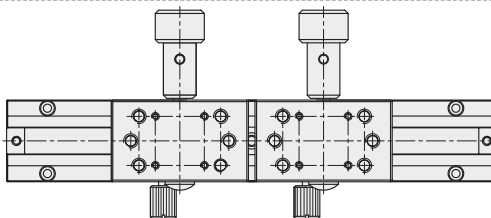

★(B) Mounting Hole Enlarged View

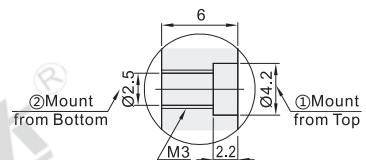

①Mount from Top: Use M2 Screws.

②Mount from Bottom: Use M3 Screws.

✖ By turning the preload adjustment screw (A) clockwise with a flathead screw driver, the stage slides slowly. By turning counterclockwise, the slides quickly and smoothly.

❗ The product can choose two blocks, but the stroke should reduce the length of the corresponding blocks, and the total length of the slider cannot be greater than its own stroke.

Part Number		N Number of Hole Rows	G	Number of Blocks	Travel Distance (mm)	Travel per Rotation (mm)	Minimum Graduation (mm)	Straightness (µm)	Parallelism (µm)	Load Capacity (kgf)	Body Weight (kg)
Code	L										
EJR01	50	2	12.5	1	±15	18	0.1	30	40	3.0	0.12
	70	3	10		±25						0.14
	100	4			±40						0.17
	150	6	12.5	±65	0.33						
	150A			2	0.39						
	200			1	0.45						
200A	8		2	±90	50	50	0.51				



Please order
as shown.

Part Number	
Code	L
EJR01	100
	150

EJR01—150

EJR01—L150



● Discount price



Per	1~4	5~
Price	100%	Additio quotat

 Delivery

10

 Z-Axis

Code	Type	Drive Direction	Main body Material	Rack Material	Surface Treatment
EJS01	Rack & Pinion Long Stroke	Z-Axis	Aluminum Alloy	Brass	Black Anodize

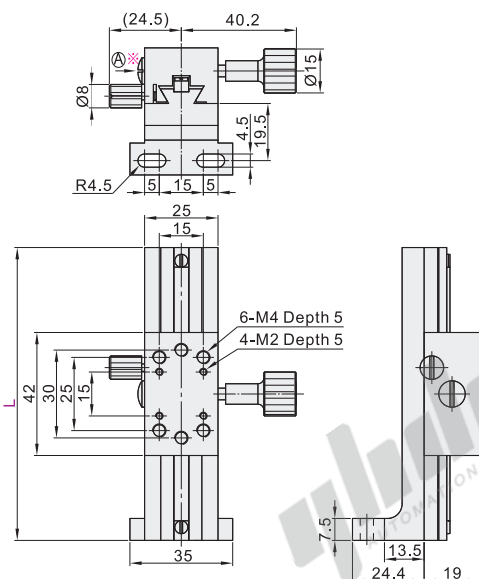

The first perspective

Part Number		Travel Distance (mm)	Travel per Rotation (mm)	Minimum Graduation (mm)	Load Capacity (N)	Body Weight (kg)
Code	L					
EJS01	50	±15	18	0.1	14.7	0.14
	70	±25				0.16
	100	±40				0.24
	150	±65				0.24



Please order

Part Number		Travel Distance (mm)
Code	L	
EJS01	100	±40
	150	+65

EJS01—L150



● Discount price

Per	1~9	10~
Price	100%	Additional quotation



Delivery

10

✖ By turning the preload adjustment screw (A) clockwise with a flathead screw driver, the stage slides slowly. By turning counterclockwise, the slides quickly and smoothly.