

Telescopic Slide Rails



35 Series, Three Step Slide Medium Load Type

Three Step Slide, SUS304

Code	Type		Width	Material	Surface Treatment
IDC06	Three Step Slide	Fully Telescopic	35.3	SUS304	—



RoHS

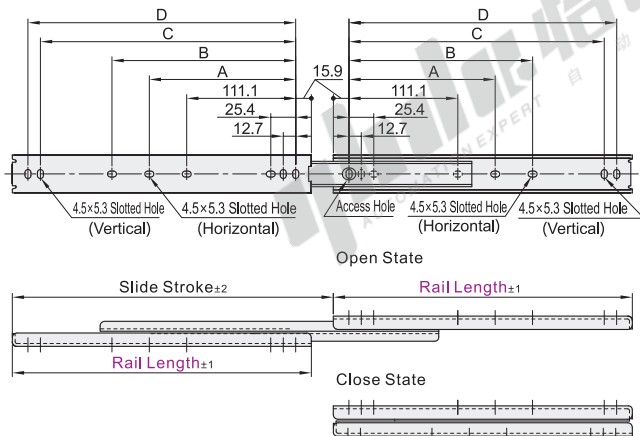

Features:

- Corrosion resistant since made of stainless steel.
- Rail Disassembly: Not Possible.


Precautions:

- For horizontal installation, the target value of load rating is 25% (Reference Value).
- Use M4 Recessed Truss Machine Screws or Recessed Binding Head Screws to mount rails.

❗ Sales in single root unit.

❗ Depending on the production batch, the cross-sectional shape may be slightly different.

❗ The Load Rating and Weight are for reference only.



The first perspective



Part Number	Slide Stroke	A	B	C	D	Load Rating (N/2 Pcs)	Reference Weight (kg/pcs)
Code	Rail Length						
304.8	327.2	—	149.2	260.3	273.0	60kgf	0.78
355.6	378.0	—	200.0	311.1	323.8	59kgf	0.90
406.4	428.4	—	250.8	361.9	374.6	57kgf	1.03
457.2	479.2	212.7	301.6	412.7	425.4	56kgf	1.15
508	530.0	238.1	352.4	463.5	476.2	54kgf	1.21
558.8	580.8	263.5	403.2	514.3	527.0	51kgf	1.28
609.6	631.6	288.9	454.0	565.1	577.8	49kgf	1.35
660.4	682.4	314.3	504.8	615.9	628.6	47kgf	1.43
711.2	733.2	339.7	555.6	666.7	679.4	45kgf	1.52

Three Step Slide, SPCC

Code	Type		Width	Material	Surface Treatment
IDC07	Three Step Slide	Fully Telescopic	35.3	SPCC	Enviromental Zinc-plated(Blue White)



RoHS

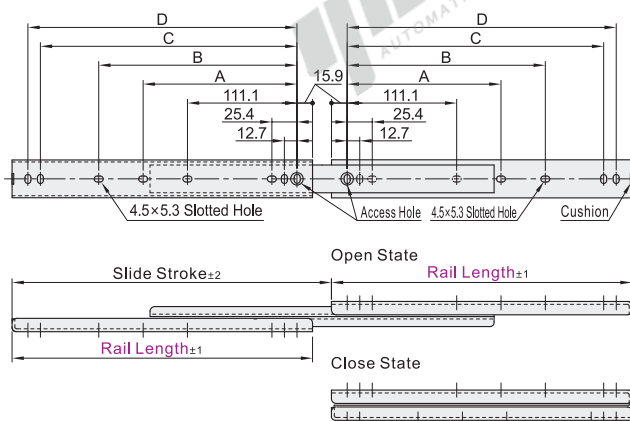

Features:

- The main body of the rails are steel, Environmental zinc-plated (Blue White) surface treatment.
- Rail Disassembly: Not Possible.


Precautions:

- For horizontal installation, the target value of load rating is 25% (Reference Value).
- Use M4 Recessed Truss Machine Screws or Recessed Binding Head Screws to mount rails.

❗ Sales in single root unit.

❗ Depending on the production batch, the cross-sectional shape may be slightly different.

❗ The Load Rating and Weight are for reference only.



The first perspective

Part Number	Slide Stroke	A	B	C	D	Load Rating (N/2 Pcs)	Reference Weight (kg/pcs)
Code	Rail Length						
305	324.2	—	149.2	260.3	273.0	50.0kgf	0.48
356	375.4	—	200.0	311.1	323.8	52.9kgf	0.52
406	424.6	—	250.8	361.9	374.6	50.0kgf	0.56
457	475.8	212.7	301.6	412.7	425.4	46.1kgf	0.66
508	527	238.1	352.4	463.5	476.2	45.1kgf	0.74
559	578.2	263.5	403.2	514.3	527.0	40.2kgf	0.86
610	629.4	288.9	454.0	565.1	577.8	35.3kgf	0.97
660	678.6	314.3	504.8	615.9	628.6	33.3kgf	1.19
711	729.8	339.7	555.6	666.7	679.4	29.4kgf	1.43

Three Step Slide, SPCC

Part Number	Slide Stroke
Code	Rail Length
305	324.2
356	375.4

IDC07 — 305



Please order as shown



Discount price
Per 1~9 10~
Price 100% Additional quotation



Delivery
2