


# (Precision)Vacuum Pad (Precision)Vacuum Pad with Fitting


## ◀ for Thin Objects

### ❑ Vacuum Pad


| Code    | Material           | Color       |
|---------|--------------------|-------------|
| J-WEP46 | Nitrile Rubber NBR | Black       |
| J-WEP47 | Phlorosilicon S    | Light Brown |

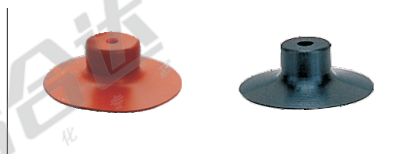


Pad Diameter Ø8




Pad Diameter Ø10



Pad Diameter Ø15



Pad Diameter Ø20



The first perspective

| Part Number |                |
|-------------|----------------|
| Code        | Pad Diameter d |
| J-WEP46     | 8              |
| J-WEP47     | 10             |
|             | 15             |
|             | 20             |



| Part Number |    |
|-------------|----|
| Code        | d  |
| J-WEP46     | Ø8 |
| J-WEP47     | 15 |

J-WEP46 - d10




| Discount price |      |
|----------------|------|
| Per            | 1~29 |
| Price          | 100% |




| Delivery |      |
|----------|------|
| Per      | 1~29 |
| Price    | 100% |

### ❑ Vacuum Pad with Fitting


| Code    | Type                             | Takeover Method | Pad Material       | Color       |
|---------|----------------------------------|-----------------|--------------------|-------------|
| J-WEU61 | Fixed Type, Vacuum Port on Top   | One-Touch Type  | Nitrile Rubber NBR | Black       |
| J-WEU62 |                                  |                 | Phlorosilicon FS   | Light Brown |
| J-WEU66 | Spring Type, Vacuum Port on Top  |                 | Nitrile Rubber NBR | Black       |
| J-WEU67 |                                  |                 | Phlorosilicon FS   | Light Brown |
| J-WEU71 | Spring Type, Vacuum Port on Side | Screw Type      | Nitrile Rubber NBR | Black       |
| J-WEU72 |                                  |                 | Phlorosilicon FS   | Light Brown |
| J-WEU76 | Spring Type, Direct-Mount        |                 | Nitrile Rubber NBR | Black       |
| J-WEU77 |                                  |                 | Phlorosilicon FS   | Light Brown |

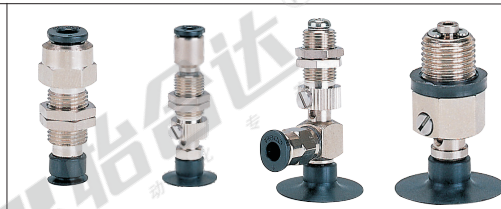


Fixed Type, Vacuum Port on Top  
J-WEU61/62




Spring Type, Vacuum Port on Top  
J-WEU66/67



Spring Type, Vacuum Port on Side  
J-WEU71/72



Spring Type, Direct-Mount  
J-WEU76/77



The first perspective

### ❑ Fixed Type, Vacuum Port on Top

| Part Number |            | B    | L1  | L2  | Weight (g) |
|-------------|------------|------|-----|-----|------------|
| Code        | Pad Dia. d |      |     |     |            |
| J-WEU61     | 8          | 30.3 | 5.5 | 8   | 10.2       |
| J-WEU62     | 10         | 30.6 | 5.8 | 8.3 | 10.3       |
| J-WEU66     | 15         | 31.3 | 6.5 | 9   | 10.3       |
| J-WEU67     | 20         | 32.1 | 7.3 | 9.8 | 10.4       |

### ❑ Spring Type, Vacuum Port on Top

| Part Number |            | B    | L1  | L2   | Spring Max. Load (N) | Weight (g) |
|-------------|------------|------|-----|------|----------------------|------------|
| Code        | Pad Dia. d |      |     |      |                      |            |
| J-WEU66     | 8          | 42.2 | 5.5 | 16.5 | 1.0~1.9              | 8.9        |
| J-WEU67     | 10         | 42.5 | 5.8 | 16.8 |                      | 9          |
| J-WEU71     | 15         | 43.2 | 6.5 | 17.5 |                      | 9          |
| J-WEU72     | 20         | 44   | 7.3 | 18.3 |                      | 9.1        |

### ❑ Spring Type, Vacuum Port on Side

| Part Number |            | B    | L1  | L2   | Spring Max. Load (N) | Weight (g) |
|-------------|------------|------|-----|------|----------------------|------------|
| Code        | Pad Dia. d |      |     |      |                      |            |
| J-WEU71     | 8          | 39.5 | 5.5 | 23.5 | 1.0~1.9              | 14.2       |
| J-WEU72     | 10         | 39.8 | 5.8 | 23.8 |                      | 14.3       |
| J-WEU76     | 15         | 40.5 | 6.5 | 24.5 |                      | 14.3       |
| J-WEU77     | 20         | 41.3 | 7.3 | 25.3 |                      | 14.4       |

### ❑ Spring Type, Direct-Mount

| Part Number |            | B    | L1  | L2   | Spring Max. Load (N) | Weight (g) |
|-------------|------------|------|-----|------|----------------------|------------|
| Code        | Pad Dia. d |      |     |      |                      |            |
| J-WEU76     | 8          | 30.5 | 5.5 | 21   | 2.3~3.9              | 14.2       |
| J-WEU77     | 10         | 30.8 | 5.8 | 21.3 |                      | 14.3       |
| J-WEU71     | 15         | 31.5 | 6.5 | 22   |                      | 14.3       |
| J-WEU72     | 20         | 32.3 | 7.3 | 22.8 |                      | 14.4       |



| Part Number |     |
|-------------|-----|
| Code        | d   |
| J-WEU66     | Ø10 |
| J-WEU67     | 15  |


J-WEU66 - d10



| Discount price |      |
|----------------|------|
| Per            | 1~29 |
| Price          | 100% |



| Delivery |      |
|----------|------|
| Per      | 1~29 |
| Price    | 100% |



❑ Characteristic  
Thin object type is suitable for conveying a thin paper-like object such as vinyl.

