



Antivibration Pads

Code	Type	Material	Hardness
NFK01	Standard Type	Nitrile Rubber	Shore A35
NFK11	Hole Machining Type		


ⓘ When selecting the hole processing products, tiny flaw might occurs on the edge of the hole, while the product performance and usage won't be effected.

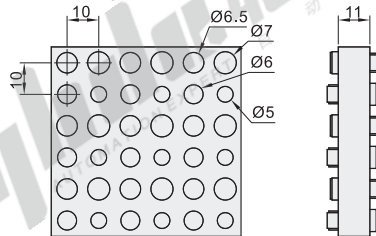


Standard Type
NFK01





Hole Machining Type
NFK11 1K(1 Hole)



2K(2 Holes)

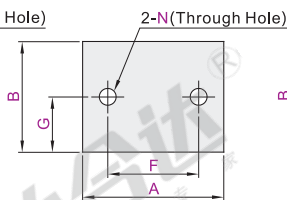

4K(4 Holes)

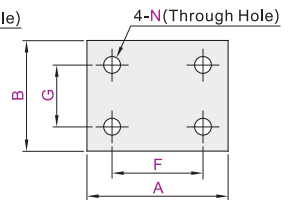

The first perspective



Standard Type

Part Number		A	B	Applicable Load N(kgf)	Deflection Characteristic N/mm(kgf/mm)
Code	T				
NFK01	18	60	60	230~1000(23.5~102)	115(11.7)
		120	120	980~4000(100~408)	245(25)
		180	180	2480~8000(253~897)	895(91.3)
		240	240	4000~16000(408~1632)	1450(148)

Hole Machining Type

Part Number			60 mm Increment		1 mm Increment		1 mm Increment	Applicable Load N(kgf)/cm ²	Deflection Characteristic N/mm(kgf/mm)/cm ²
Code	T	Nominal	A	B	F	G	N Hole Dia.		
NFK11	18	1K	60~300	60~300	5~295	5~295	3~20	9(0.92)	3.8(0.39)
		2K							
		4K							

ⓘ When choosing F and G size, please consider the hole margin and hole spacing.

 Optional Processing	Alteration	Hole Position from Left		Hole Position from Bottom		
	Code	AB ()		AC ()		
Spec.		Ordering Code AB15 ① 1mm Increment ② AB The value range is:3~287. ③ Applicable to 2K and 4K Type only.			Ordering Code AC38 ① 1mm Increment ② AC The value range is:3~287. ③ Applicable to 4K Type only.	

Hole Machining Type

Part Number		A	B	F	G	N
Code	T					
NFK11	18	60~300	60~300	5~295	5~295	3~20

NFK11-T18-1K-A60-B60-F30-G30-N6

Optional Processing

Part Number		A	B	F	G	N	Optional Processing Code
Code	T						
NFK11	18	60~300	60~300	5~295	5~295	3~20	ABD AC ()

NFK11-T18-2K-A60-B60-F30-G30-N6-AB15



Please order as shown



Discount price
Per 1~19 20~
Price 100% Additional quotation



Delivery
12