


Antivibration Rubber Mounts

- ◀ Both Ends Threaded
- ◀ One End Threaded, One End Tapped


Both Ends Threaded

Code	Type			Material		Rubber Hardness	Surface Treatment
				Main Body	Metal Fitting		
NHF01	Both Ends Threaded	Economic Type	Waist Type	Natural Rubber	S45C	Shore A60	Zinc-plated

- ① Small amount of rubber residue during processing ,it does not affect product performance.
 ② Product contains anti-aging additives , the surface of the product will continue to slowly precipitate white wax, which is normal and does not affect product performance.

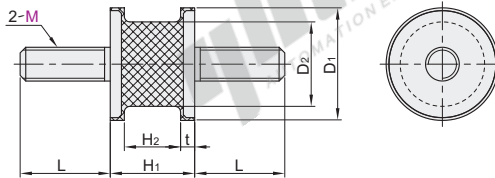

Before and after white wax is precipitate



Part Number		M	D1	D2	H1	H2	t	L	Z Direction			X Direction		Rigidity Ratio kx/kz
Code	No.								Allowable Load N (kgf)	Working Load N (kgf)	Spring Constant N/mm (kgf/cm)	Allowable Load N (kgf)		
NHF01	1216	5	12	10	16	11		12	110{11}	30~78{3~8}	41{42}	25{2.5}		0.20
	1515		15	12	15	10	2.5	15	160{16}	59~130{6~13}	74{75}	34{3.5}		
	2015		20	15	20	15		16	280{29}	98~160{10~16}	130{130}	69{7}		
	2020	6	20	15	20	15		16	180{18}	59~98{6~10}	78{80}	49{5}		0.19
	2518		25	20	18	11		18	490{50}	128~250{13~25}	200{200}	98{10}		
	2527		25	20	27	20		18	310{32}	88~160{9~16}	93{95}	59{6}		
	3018	8	30	25	18	11	3.5	23	890{91}	226~450{23~46}	310{320}	170{17}		0.16
	3026		30	25	26	19		23	610{62}	147~300{15~31}	140{145}	120{12}		
	3526		35	30	26	19		23	980{100}	245~490{25~50}	240{240}	250{25}		
	4025*		40	34	25	18		28	1810{185}	363~930{37~95}	340{350}	360{37}		0.17

- ① Due to different processing , the screw of specification 4025 with * is split type.



Please order as shown

Part Number		M
Code	No.	
NHF01	1216	5
NHF01	1515	5

NHF01-1216-M5



Discount price	
Per	1~9 10~
Price	100% Additional quotation




Delivery	
Per	1~9 10~
Price	100% Additional quotation



One End Threaded, One End Tapped

Code	Type			Material		Rubber Hardness	Surface Treatment
				Main Body	Metal Fitting		
NHF09	One End Threaded, One End Tapped	Economic Type	Waist Type	Natural Rubber	S45C	Shore A60	Zinc-plated

- ① Small amount of rubber residue during processing ,it does not affect product performance.
 ② Product contains anti-aging additives , the surface of the product will continue to slowly precipitate white wax, which is normal and does not affect product performance.

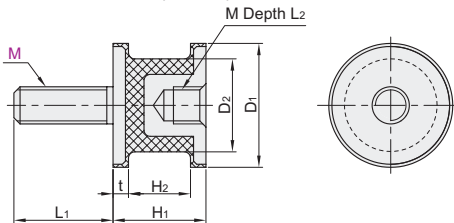

Before and after white wax is precipitate



Part Number		M	D1	D2	H1	H2	t	L1	L2 (min)	Z Direction			X Direction		Rigidity Ratio kx/kz
Code	No.									Allowable Load N (kgf)	Working Load N (kgf)	Spring Constant N/mm (kgf/cm)	Allowable Load N (kgf)		
NHF09	1216	5	12	10	16	11		12	5	110{11}	30~78{3~8}	62{63}	25{2.5}		0.20
	1515		15	12	15	10	2.5	15	15	160{16}	59~130{6~13}	110{110}	34{3.5}		
	2015		20	15	20	15		16	16	280{29}	98~160{10~16}	180{180}	69{7}		
	2020	6	20	15	20	15		16	6	180{18}	59~98{6~10}	78{80}	49{5}		0.19
	2518		25	20	18	11		18	18	580{59}	147~280{15~29}	220{220}	98{10}		
	2527		25	20	27	20		18	18	310{32}	88~160{9~16}	93{95}	59{6}		
	3018	8	30	25	18	11	3.5	23	8	1700{170}	415~830{43~85}	610{620}	250{25}		0.15
	3026		30	25	26	19		23	23	760{77}	196~370{20~38}	180{180}	150{15}		
	3526		35	30	26	19		23	23	1100{110}	275~550{28~56}	250{260}	260{27}		
	4025		40	34	25	18		28	28	1420{145}	363~700{37~71}	340{350}	320{33}		0.23

- ① Due to different processing , the screw of specification 4025 with * is split type.



Please order as shown

Part Number		M
Code	No.	
NHF09	1216	5
NHF09	1515	5

NHF09-1216-M5



Discount price	
Per	1~9 10~
Price	100% Additional quotation



Delivery	
Per	1~9 10~
Price	100% Additional quotation