


Thread Dia. Configurable

One End Threaded-One End Tapped, L Configurable


Circular Posts

Thread Dia. Configurable

Code	Type	Material		Surface Treatment
		GB	Equiv.	
RAF23	L Configurable	Q235	SS400	Electroless Nickel Plating
RAF26		0Cr18Ni9	SUS304	

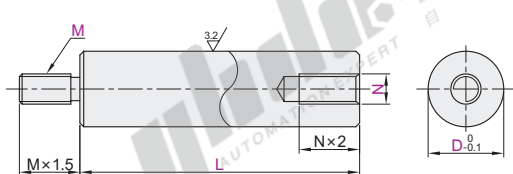

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4



Anti-rust Oil is applied on Q235 or Equivalent products.

Part Number		0.5 mm Inc.				
Code	D	L	M·N			
RAF23 RAF26	5	15.0~60.0	2.6	3		
	6		3	4		
	8	20.0~160.0	3	4	5	
	10	20.0~360.0	4	5	6	
	12	25.0~420.0	5	6	8	
	15	30.0~520.0	6	8	10	
	20	40.0~520.0	6	8	10	12
	25	55.0~620.0	6	8	10	12 16
	30	65.0~720.0	6	8	10	12 16 20
	35	80.0~820.0	8	10	12	16 20 24
	40	80.0~920.0	10	12	16	20 24
	50	80.0~1020.0	12	16	20	24



Part Number	D	0.5 mm Inc.	L	M	N
RAF23	5	15~60	2.6	3	
RAF26	6		3	4	

RAF26—D5—L50—M2.6—N3

Optional Processing

Part Number	D	0.5 mm Inc.	L	M	N	Optional Processing Code
RAF23	5	15~60	2.6	3		CC MC() LD()
RAF26	6		3	4		

RAF26—D5—L50—M2.6—N3—LC


Discount price	Per	1~4	5~
Price	100%		Additional quotation

Delivery	10
----------	----

Optional processing details are listed below.

Thread Dia. Configurable, with Wrench Flats

Code	Type	Material		Surface Treatment
		GB	Equiv.	
RAF33	L Configurable	Q235	SS400	Electroless Nickel Plating
RAF36		0Cr18Ni9	SUS304	

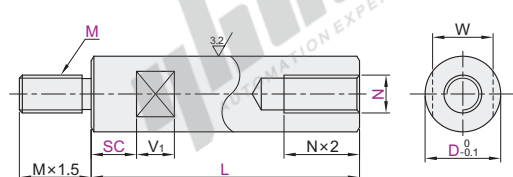

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4



Anti-rust Oil is applied on Q235 or Equivalent products.

Part Number	D	0.5 mm Inc.	L	1 mm Inc.	SC	M	N	W	V1
RAF33 RAF36	5	15.0~60.0	0~50	2.6	3			4	
	6			3	4			5	10
	8	20.0~160.0	0~150	3	4	5		7	
	10	20.0~360.0	0~350	4	5	6		8	
	12	25.0~420.0	0~408	5	6	8		10	
	15	30.0~520.0		6	8	10		13	
	20	40.0~520.0	0~508	6	8	10	12	17	12
	25	55.0~620.0	0~610	6	8	10	12	22	
	30	65.0~720.0	0~705	6	8	10	12	16	20
	35	80.0~820.0	0~805	8	10	12	16	20	24
	40	80.0~920.0	0~900	10	12	16	20	24	
	50	80.0~1020.0	0~1000	12	16	20	24		



Part Number	D	L	SC	M	N
RAF33	5	15~60	0~50	2.6	3
RAF36	6			3	4

RAF36—D5—L50—SC0—M3—N3

Optional Processing

Part Number	D	L	SC	M	N	Optional Processing Code
RAF33	5	15~60	0~50	2.6	3	CC MC() LD()
RAF36	6			3	4	

RAF36—D5—L50—SC10—M3—N3—LC

Discount price	Per	1~4	5~
Price	100%		Additional quotation

Delivery	10
----------	----



Code	Spec.
LC	Changes the L Dimension Tolerance [Ordering Code] LC When L15~300, L±0.05; When L300.5~1020, L±0.10
MC()	Changes the Threaded Length [Ordering Code] MC8 0.1mm Inc. Not applicable to D=5. M×1≤MC<M×1.5

Code	Spec.
LD()	Through Hole for Hexagonal Wrench [Ordering Code] LD35 1mm Inc. d/2+5≤LD≤L-(d/2+5) Applicable to D=8~30 only.

d	Hex Wrench Width
8	2.5
10	3
12	3.5
15	4
20	5
25	6
30	8