


Standard/with Wrench Flats

One End Threaded, One End Tapped-Thread Length Configurable


Circular Posts

Standard

Code	Type	Standard	Material		Surface Treatment
			GB	Equiv.	
RAH03	Thread Length	Standard	Q235	SS400	Electroless Nickel Plating
RAH06	Configurable		0Cr18Ni9	SUS304	

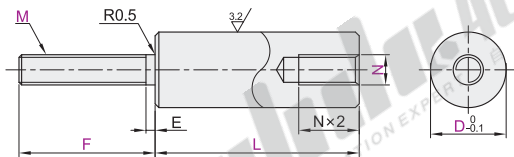

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4



Anti-rust Oil is applied on Q235 or Equivalent products.

The first perspective

Part Number	0.5 mm Inc.			M		N		E
Code	D	L	F					
RAH03 RAH06	5	15.0~60.0	5.0~25.0	2.6	3	2.6	3	1.0
	6		5.0~30.0	3	4	3	4	
	8	20.0~160.0	8.0~40.0	4	5	4	5	1.6
	10	20.0~360.0	8.0~45.0	4	5	4	5	2.0
	12	25.0~420.0	10.0~55.0	5	6	5	6	2.5
	15	30.0~520.0	12.0~60.0	6	8	6	8	3.0
	20	40.0~520.0	15.0~75.0	6	8	6	8	3.5
	25	55.0~620.0	20.0~80.0	6	8	6	8	4.0
	30	65.0~720.0	25.0~90.0	6	8	6	8	5.0
	35	80.0~820.0	30.0~100.0	8	10	8	10	
	40	80.0~920.0	35.0~110.0	10	12	10	12	6.0
	50	80.0~1020.0	40.0~120.0	12	16	12	16	

Optional processing details are listed below.

Optional Processing



Part Number	0.5 mm Inc.			M	N
Code	D	L	F		
RAH03	6	15~60	5~30	3	4
RAH06	8	20~190	6~40	4	5

RAH06—D8—L125—F20—M4—N5 RAH06—D8—L125—F20—M4—N5—LD35

Part Number	0.5 mm Inc.			M	N	Optional Processing Code
Code	D	L	F			
RAH03	6	15~60	5~30	3	4	AC
RAH06	8	20~190	6~40	4	5	LD




Discount price	Per	1~4	5~
Price	100%	Additional quotation	

Delivery	6
----------	---

with Wrench Flats

Code	Type	Standard	Material		Surface Treatment
			GB	Equiv.	
RAH13	Thread Length	with Wrench Flats	Q235	SS400	Electroless Nickel Plating
RAH16	Configurable		0Cr18Ni9	SUS304	

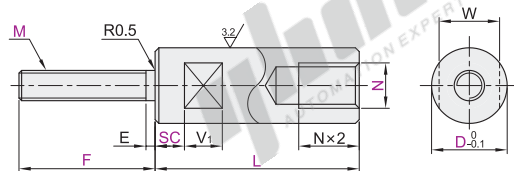

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4



Anti-rust Oil is applied on Q235 or Equivalent products.

The first perspective

Part Number	0.5 mm Inc.			M		N		W	V1	E
Code	D	L	F							
RAH13 RAH16	5	15.0~60.0	5.0~25.0	2.6	3	2.6	3	4		1.0
	6		5.0~30.0	3	4	3	4	5	10	
	8	20.0~160.0	8.0~40.0	4	5	4	5	7		1.6
	10	20.0~360.0	8.0~45.0	4	5	4	5	8		2.0
	12	25.0~420.0	10.0~55.0	5	6	5	6	10		2.5
	15	30.0~520.0	12.0~60.0	6	8	6	8	13		3.0
	20	40.0~520.0	15.0~75.0	6	8	6	8	17	12	3.5
	25	55.0~620.0	20.0~80.0	6	8	6	8	22		4.0
	30	65.0~720.0	25.0~90.0	6	8	6	8	27		5.0
	35	80.0~820.0	30.0~100.0	8	10	8	10	30	16	
	40	80.0~920.0	35.0~110.0	10	12	10	12	36		6.0
	50	80.0~1020.0	40.0~120.0	12	16	12	16	41	20	



Part Number	0.5 mm Inc.			SC	M	N
Code	D	L	F			
RAH13	6	15~60	5~30	0~50.0	3	4
RAH16	8	20~190	6~40	0~150.0	4	5

RAH16—D8—L125—F20—SC20—M4—N5

Optional Processing

Part Number	0.5 mm Inc.			SC	M	N	Optional Processing Code
Code	D	L	F				
RAH13	6	15~60	5~30	0~50.0	3	4	AC
RAH16	8	20~190	6~40	0~150.0	4	5	LD

RAH16—D8—L125—F20—SC20—M4—N5—LD35



Discount price	Per	1~4	5~
Price	100%	Additional quotation	

Delivery	6
----------	---



Code	Spec.		Code	Spec.																					
AC	Undercut	Ordering Code AC Adds a relief to Dimension A.	LD ()	Through Hole for Hexagonal Wrench	Ordering Code LD35																				
		 ① 1mm Inc. ② $d/2+5 \leq LD \leq (d/2+5)$ ③ Applicable to D=8~30 only.			<table><tr><th>D</th><th>d</th><th>Hex Wrench Width</th></tr><tr><td>8</td><td>2.5</td><td>2</td></tr><tr><td>10</td><td>3</td><td>2.5</td></tr><tr><td>12</td><td>3.5</td><td>3</td></tr><tr><td>15</td><td>4.6</td><td>4</td></tr><tr><td>20</td><td>5.8</td><td>5</td></tr><tr><td>25</td><td>6.9</td><td>6</td></tr><tr><td>30</td><td>9.2</td><td>8</td></tr></table>	D	d	Hex Wrench Width	8	2.5	2	10	3	2.5	12	3.5	3	15	4.6	4	20	5.8	5	25	6.9
D	d	Hex Wrench Width																							
8	2.5	2																							
10	3	2.5																							
12	3.5	3																							
15	4.6	4																							
20	5.8	5																							
25	6.9	6																							
30	9.2	8																							

Posts/Stands
Strut Clamps