


Standard/with Wrench Flats

One End Threaded, One End Tapped·Thread Length Configurable


Circular Posts

Standard

Code	Type	Standard	Material		Surface Treatment
			GB	Equiv.	
RAH03	Thread Length	Standard	Q235	SS400	Electroless Nickel Plating
RAH06	Configurable		0Cr18Ni9	SUS304	

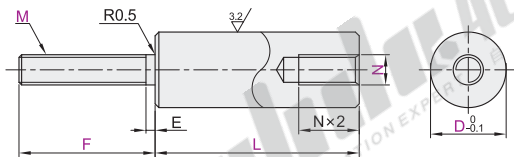

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4



Anti-rust Oil is applied on Q235 or Equivalent products.

The first perspective

Part Number	0.5 mm Inc.			M		N		E
Code	D	L	F					
RAH03 RAH06	5	15.0~60.0	5.0~25.0	2.6	3	2.6	3	1.0
	6		5.0~30.0	3	4	3	4	
	8	20.0~160.0	8.0~40.0	4	5	4	5	1.6
	10	20.0~360.0	8.0~45.0	4	5	4	5	2.0
	12	25.0~420.0	10.0~55.0	5	6	5	6	2.5
	15	30.0~520.0	12.0~60.0	6	8	6	8	3.0
	20	40.0~520.0	15.0~75.0	6	8	6	8	3.5
	25	55.0~620.0	20.0~80.0	6	8	6	8	4.0
	30	65.0~720.0	25.0~90.0	6	8	6	8	5.0
	35	80.0~820.0	30.0~100.0	8	10	8	10	
	40	80.0~920.0	35.0~110.0	10	12	10	12	6.0
	50	80.0~1020.0	40.0~120.0	12	16	12	16	

Optional processing details are listed below.

Optional Processing



Part Number	0.5 mm Inc.			M	N
Code	D	L	F		
RAH03	6	15~60	5~30	3	4
RAH06	8	20~190	6~40	4	5

RAH06—D8—L125—F20—M4—N5 RAH06—D8—L125—F20—M4—N5—LD35

Part Number	0.5 mm Inc.			M	N	Optional Processing Code
Code	D	L	F			
RAH03	6	15~60	5~30	3	4	AC
RAH06	8	20~190	6~40	4	5	LD




Discount price	Per	1~4	5~
Price	100%	Additional quotation	

Delivery	6
----------	---

with Wrench Flats

Code	Type	Standard	Material		Surface Treatment
			GB	Equiv.	
RAH13	Thread Length	with Wrench Flats	Q235	SS400	Electroless Nickel Plating
RAH16	Configurable		0Cr18Ni9	SUS304	

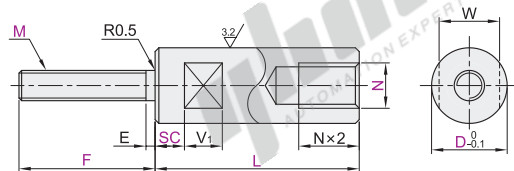

L	Tolerance
15~300	±0.2
300.5~600	±0.3
600.5~1020	±0.4



Anti-rust Oil is applied on Q235 or Equivalent products.

The first perspective

Part Number	0.5 mm Inc.			M		N		W	V1	E
Code	D	L	F							
RAH13 RAH16	5	15.0~60.0	5.0~25.0	2.6	3	2.6	3	4		1.0
	6		5.0~30.0	3	4	3	4	5	10	
	8	20.0~160.0	8.0~40.0	4	5	4	5	7		1.6
	10	20.0~360.0	8.0~45.0	4	5	4	5	8		2.0
	12	25.0~420.0	10.0~55.0	5	6	5	6	10		2.5
	15	30.0~520.0	12.0~60.0	6	8	6	8	13		3.0
	20	40.0~520.0	15.0~75.0	6	8	6	8	17	12	3.5
	25	55.0~620.0	20.0~80.0	6	8	6	8	22		4.0
	30	65.0~720.0	25.0~90.0	6	8	6	8	27		5.0
	35	80.0~820.0	30.0~100.0	8	10	8	10	30	16	
	40	80.0~920.0	35.0~110.0	10	12	10	12	36		6.0
	50	80.0~1020.0	40.0~120.0	12	16	12	16	41	20	



Part Number	0.5 mm Inc.			SC	M	N
Code	D	L	F			
RAH13	6	15~60	5~30	0~50.0	3	4
RAH16	8	20~190	6~40	0~150.0	4	5

RAH16—D8—L125—F20—SC20—M4—N5

Optional Processing

Part Number	0.5 mm Inc.			SC	M	N	Optional Processing Code
Code	D	L	F				
RAH13	6	15~60	5~30	0~50.0	3	4	AC
RAH16	8	20~190	6~40	0~150.0	4	5	LD

RAH16—D8—L125—F20—SC20—M4—N5—LD35



Discount price	Per	1~4	5~
Price	100%	Additional quotation	

Delivery	6
----------	---



Code	Spec.		Code	Spec.																							
AC	Undercut	Ordering Code AC Adds a relief to Dimension A.	LD ()	Through Hole for Hexagonal Wrench	Ordering Code LD35																						
					<table><thead><tr><th>D</th><th>d</th><th>Hex Wrench Width</th></tr></thead><tbody><tr><td>8</td><td>2.5</td><td>2</td></tr><tr><td>10</td><td>3</td><td>2.5</td></tr><tr><td>12</td><td>3.5</td><td>3</td></tr><tr><td>15</td><td>4</td><td>4</td></tr><tr><td>20</td><td>5.8</td><td>5</td></tr><tr><td>25</td><td>6.9</td><td>6</td></tr><tr><td>30</td><td>9.2</td><td>8</td></tr></tbody></table> 1mm Inc. $d/2+5 \leq LD \leq -(d/2+5)$ - Applicable to D=8~30 only.	D	d	Hex Wrench Width	8	2.5	2	10	3	2.5	12	3.5	3	15	4	4	20	5.8	5	25	6.9	6	30
D	d	Hex Wrench Width																									
8	2.5	2																									
10	3	2.5																									
12	3.5	3																									
15	4	4																									
20	5.8	5																									
25	6.9	6																									
30	9.2	8																									

Posts/Stands
Strut Clamps