


# Circular Posts


## Standard/with Wrench Flats Both Ends Threaded

### Standard

| Code  | Type               | Material |        | Surface Treatment          |
|-------|--------------------|----------|--------|----------------------------|
|       |                    | GB       | Equiv. |                            |
| RAH23 | Both Ends Threaded | Q235     | SS400  | Electroless Nickel Plating |
| RAH26 |                    | 0Cr18Ni9 | SUS304 | —                          |

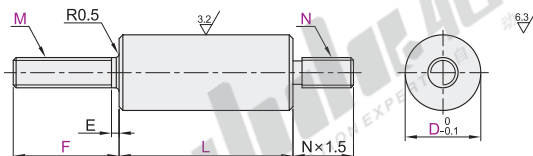

| L          | Tolerance |
|------------|-----------|
| 15~300     | ±0.2      |
| 300.5~600  | ±0.3      |
| 600.5~1020 | ±0.4      |



① Anti-rust Oil is applied on Q235 or Equivalent products.

The first perspective

| Part Number    | 0.5 mm Inc. |             |            | M   |                | N   |                | E   |
|----------------|-------------|-------------|------------|-----|----------------|-----|----------------|-----|
| Code           | D           | L           | F          |     |                |     |                |     |
| RAH23<br>RAH26 | 5           | 15.0~60.0   | 5.0~25.0   | 2.6 | 3              | 2.6 | 3              | 1.0 |
|                | 6           |             | 5.0~30.0   | 3   | 4              | 3   | 4              |     |
|                | 8           | 20.0~160.0  | 8.0~40.0   | 4   | 5              | 4   | 5              | 1.6 |
|                | 10          | 20.0~360.0  | 8.0~45.0   | 4   | 5 6            | 4   | 5 6            | 2.0 |
|                | 12          | 25.0~420.0  | 10.0~55.0  | 5   | 6 8            | 5   | 6 8            | 2.5 |
|                | 15          | 30.0~520.0  | 12.0~60.0  | 6   | 8 10           | 6   | 8 10           | 3.0 |
|                | 20          | 40.0~520.0  | 15.0~75.0  | 6   | 8 10 12        | 6   | 8 10 12        | 3.5 |
|                | 25          | 55.0~620.0  | 20.0~80.0  | 6   | 8 10 12 16     | 6   | 8 10 12 16     | 4.0 |
|                | 30          | 65.0~720.0  | 25.0~90.0  | 6   | 8 10 12 16 20  | 6   | 8 10 12 16 20  | 5.0 |
|                | 35          | 80.0~820.0  | 30.0~100.0 | 8   | 10 12 16 20 24 | 8   | 10 12 16 20 24 |     |
|                | 40          | 80.0~920.0  | 35.0~110.0 | 10  | 12 16 20 24    | 10  | 12 16 20 24    | 6.0 |
|                | 50          | 80.0~1020.0 | 40.0~120.0 | 12  | 16 20 24       | 12  | 16 20 24       |     |

① Optional processing details are listed below.

### Optional Processing



| Part Number | 0.5 mm Inc. |        |      | M   | N   |
|-------------|-------------|--------|------|-----|-----|
| Code        | D           | L      | F    |     |     |
| RAH23       | 6           | 15~60  | 5~30 | 3 4 | 3 4 |
| RAH26       | 8           | 20~160 | 8~40 | 4 5 | 4 5 |

| Part Number | 0.5 mm Inc. |        |      | M   | N   | Optional Processing Code |
|-------------|-------------|--------|------|-----|-----|--------------------------|
| Code        | D           | L      | F    |     |     |                          |
| RAH23       | 6           | 15~60  | 5~30 | 3 4 | 3 4 | AC                       |
| RAH26       | 8           | 20~160 | 8~40 | 4 5 | 4 5 | LD                       |




| Discount price | Per | 1~4 | 5~                   |
|----------------|-----|-----|----------------------|
| Price 100%     |     |     | Additional quotation |


| Delivery | 6 |
|----------|---|
|----------|---|

### with Wrench Flats

| Code  | Type               | Material |        | Surface Treatment          |
|-------|--------------------|----------|--------|----------------------------|
|       |                    | GB       | Equiv. |                            |
| RAH33 | Both Ends Threaded | Q235     | SS400  | Electroless Nickel Plating |
| RAH36 |                    | 0Cr18Ni9 | SUS304 | —                          |

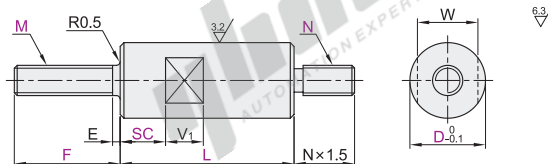

| L          | Tolerance |
|------------|-----------|
| 15~300     | ±0.2      |
| 300.5~600  | ±0.3      |
| 600.5~1020 | ±0.4      |



① Anti-rust Oil is applied on Q235 or Equivalent products.

The first perspective

| Part Number    | 0.5 mm Inc. |             |            | M   |                | N   |                | W  | V1 | E   |
|----------------|-------------|-------------|------------|-----|----------------|-----|----------------|----|----|-----|
| Code           | D           | L           | F          |     |                |     |                |    |    |     |
| RAH33<br>RAH36 | 5           | 15.0~60.0   | 5.0~25.0   | 2.6 | 3              | 2.6 | 3              | 4  |    | 1.0 |
|                | 6           |             | 5.0~30.0   | 3   | 4              | 3   | 4              | 5  | 10 |     |
|                | 8           | 20.0~160.0  | 8.0~40.0   | 4   | 5              | 4   | 5              | 7  |    | 1.6 |
|                | 10          | 20.0~360.0  | 8.0~45.0   | 4   | 5 6            | 4   | 5 6            | 8  |    | 2.0 |
|                | 12          | 25.0~420.0  | 10.0~55.0  | 5   | 6 8            | 5   | 6 8            | 10 |    | 2.5 |
|                | 15          | 30.0~520.0  | 12.0~60.0  | 6   | 8 10           | 6   | 8 10           | 13 |    | 3.0 |
|                | 20          | 40.0~520.0  | 15.0~75.0  | 6   | 8 10 12        | 6   | 8 10 12        | 17 | 12 | 3.5 |
|                | 25          | 55.0~620.0  | 20.0~80.0  | 6   | 8 10 12 16     | 6   | 8 10 12 16     | 22 |    | 4.0 |
|                | 30          | 65.0~720.0  | 25.0~90.0  | 6   | 8 10 12 16 20  | 6   | 8 10 12 16 20  | 27 |    | 5.0 |
|                | 35          | 80.0~820.0  | 30.0~100.0 | 8   | 10 12 16 20 24 | 8   | 10 12 16 20 24 | 30 | 16 |     |
|                | 40          | 80.0~920.0  | 35.0~110.0 | 10  | 12 16 20 24    | 10  | 12 16 20 24    | 36 |    | 6.0 |
|                | 50          | 80.0~1020.0 | 40.0~120.0 | 12  | 16 20 24       | 12  | 16 20 24       | 41 | 20 |     |



| Part Number | 0.5 mm Inc. |        |      | SC      | M   | N   |
|-------------|-------------|--------|------|---------|-----|-----|
| Code        | D           | L      | F    |         |     |     |
| RAH33       | 6           | 15~60  | 5~30 | 0~50.0  | 3 4 | 3 4 |
| RAH36       | 8           | 20~160 | 8~40 | 0~150.0 | 4 5 | 4 5 |

RAH36—D8—L125—F20—SC20—M4—N5

### Optional Processing

| Part Number | 0.5 mm Inc. |        |      | SC      | M   | N   | Optional Processing Code |
|-------------|-------------|--------|------|---------|-----|-----|--------------------------|
| Code        | D           | L      | F    |         |     |     |                          |
| RAH33       | 6           | 15~60  | 5~30 | 0~50.0  | 3 4 | 3 4 | AC                       |
| RAH36       | 8           | 20~160 | 8~40 | 0~150.0 | 4 5 | 4 5 | LD                       |

RAH36—D8—L125—F20—SC20—M4—N5—LD35




| Discount price | Per | 1~4 | 5~                   |
|----------------|-----|-----|----------------------|
| Price 100%     |     |     | Additional quotation |


| Delivery | 6 |
|----------|---|
|----------|---|



| Code | Spec.                                                         |
|------|---------------------------------------------------------------|
| AC   | Undercut<br>Ordering Code AC<br>Adds a relief to Dimension A. |



| Code | Spec.                                                                                                                                                              |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LD   | Through Hole for Hexagonal Wrench<br>Ordering Code LD35<br>D d Hex Wrench Width<br>8 2.5 2<br>10 3 2.5<br>12 3.5 3<br>15 4.6 4<br>20 5.8 5<br>25 6.9 6<br>30 9.2 8 |



① 1mm Inc.  
② d/2+5≤Ld≤L-(d/2+5)  
③ Applicable to D=8~30 only.