



Hexagonal Posts

◀ L Configurable/L Dimension, Thread Dia. Configurable
One End Threaded, One End Tapped

□ L Configurable

Code	Type	L Configurable	Material		Surface Treatment
			GB	Equiv.	
RBE02	One End Threaded, One End Tapped	L Configurable	Q235	SS400	Electroless Nickel Plating
RBE06			0Cr18Ni9	SUS304	—

L	Tolerance
8~300	±0.2
300.5~620	±0.3
620.5~1020	±0.4

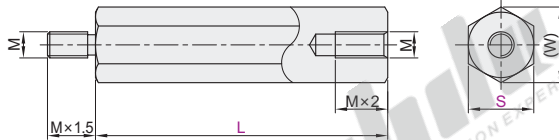

① Anti-rust Oil is applied on Q235 or Equivalent products.

Part Number		0.5 mm Inc.	M	(W)
Code	S	L		
RBE02 RBE06	5	8.0~60.0	2.6	5.8
	6	15.0~60.0	3	6.9
	7	20.0~160.0	4	8.1
	8	20.0~260.0	5	9.2
	10	25.0~360.0	6	11.5
	12	25.0~420.0		13.9
	13	30.0~420.0	8	15.0
	14	30.0~520.0		16.2
	17	35.0~520.0	10	19.6
	19	45.0~520.0	12	21.9
	24	55.0~620.0	16	27.7
	27	65.0~820.0	20	31.2
	30	65.0~1020.0	20	34.6
	32	80.0~1020.0	24	36.9



Please order as shown

Part Number	S	0.5 mm Inc.
RBE02	6	15~60
RBE06	7	20~160
RBE06—S6—L25		

□ Optional Processing

Part Number		0.5 mm Inc.	Optional Processing Code
Code	S	L	
RBE02	6	15~60	LC MC()
RBE06	7	20~160	
RBE06 — S6 — L25 — MC4			




Discount price			
Per	1~4	5~	
Price	100%	Additional quotation	



Delivery	
10	

□ L Dimension, Thread Dia. Configurable

Code	Type	L Dimension, Thread Dia. Configurable	Material		Surface Treatment
			GB	Equiv.	
RBE12	One End Threaded, One End Tapped	L Dimension, Thread Dia. Configurable	Q235	SS400	Electroless Nickel Plating
RBE16			0Cr18Ni9	SUS304	—

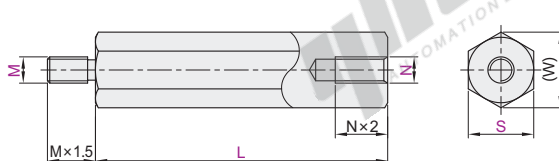

L	Tolerance
8~300	±0.2
300.5~620	±0.3
620.5~1020	±0.4



① Anti-rust Oil is applied on Q235 or Equivalent products.

Part Number		0.5 mm Inc.	M-N		(W)
Code	S	L			
RBE12 RBE16	5	8.0~60.0	2 2.6		5.8
	6	15.0~60.0	3 4		6.9
	7	20.0~160.0	3 4		8.1
	8	20.0~260.0	3 4 5		9.2
	10	25.0~360.0	4 5 6		11.5
	12	30.0~420.0	4 5 6 8		13.9
	13	35.0~420.0	4 5 6 8		15.0
	14	35.0~520.0	4 5 6 8 10		16.2
	17	45.0~520.0	5 6 8 10		19.6
	19	55.0~620.0	5 6 8 10 12		21.9
	24	65.0~820.0	6 8 10 12 16		27.7
	27	80.0~1020.0	5 6 8 10 12 16 20 24		31.2
	30	80.0~1020.0	5 6 8 10 12 16 20 24		34.6
	32	80.0~1020.0	5 6 8 10 12 16 20 24		36.9



Please order as shown

Part Number	S	0.5 mm Inc.	M-N
RBE12	6	15~60	3 4
RBE16	7	20~160	3 4
RBE16—S6—L25—M4—N4			

□ Optional Processing

Part Number		0.5 mm Inc.	M-N	Optional Processing Code
Code	S	L		Code
RBE12	6	15-60	3 4	LC MC()
RBE16	7	20-160	3 4	
RBE16-S6-L25-M4-N4-MC4				



Discount price			
Per	1~4	5~	
Price	100%	Additional quotation	



Delivery	
10	



Optional Processing

Code	Spec.		Code	Spec.	
LC	 Changes the L Dimension Tolerance	Ordering Code LC □ When L8~300, L±0.05; When L300.5~620, L±0.10; When L620.5~1020, L±0.15.	 Changes The Thread Length.	Ordering Code MC8 □ 0.1mm Inc. □ M×1≤MC<M×1.5	