



Washer Assembled Hexagon Socket Head Cap Screws Hex Nuts

Washer Assembled Hexagon Socket Head Cap Screws

Code	Type	Material		Surface Treatment	Strength Class
		GB	Equiv.		
TAM02	Washer Assembled Hexagon Socket Head Cap Screws	0Cr18Ni9	SUS304	—	A2-70

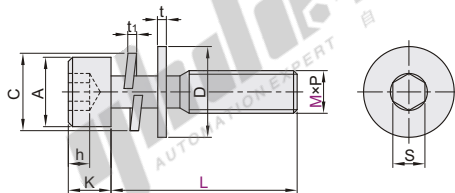

The first perspective

Part Number		L		P	A		K		S		C		D		t		t ₁		h
Code	M			Pitch	max	min	max	min	max	min	max	min	max	min	max	min	max	min	(min)
TAM02	3	8	10 12	0.5	5.68	5.32	3	2.86	2.58	2.52	5.43	4.89	7	6.64	0.55	0.45	0.9	0.7	1.3
	4	10	12 16	0.7	7.22	6.78	4	3.82	3.08	3.02	6.98	6.4	9	8.64	0.9	0.7	1.2	1	2
	5	12	16 20	0.8	8.72	8.28	5	4.82	4.095	4.02	8.95	8.25	10	9.64	1.1	0.9	1.4	1.2	2.5
	6	16	20 25 30	1	10.22	9.78	6	5.7	5.14	5.02	11.01	10.11	12	11.57	1.8	1.4	1.7	1.5	3
	8	20	25 30 35	1.25	13.27	12.73	8	7.64	6.14	6.02	13.94	12.98	16	15.57	2.2	1.8	2.1	1.9	4
	10	25	30 35 40	1.5	16.27	15.73	10	9.64	8.175	8.025	16.99	15.83	20	19.48	2.7	2.3	2.65	2.35	5



Please order as shown

Part Number		L	
Code	M		
TAM02	3	8	10 12
	4	10	12 16
	5	12	16 20

TAM02—M3—L8





Discount price	
Per	1~99 100~
Price	100% Additional quotation



Delivery	
Per	1~99 100~
Price	100% Additional quotation

Hex Nuts

Code	Type	Thread	Material		Surface Treatment
			GB	Equiv.	
TBK55	Standard	Coarse	0Cr18Ni9	SUS304	—



The first perspective

Applicable Standards:
DIN 934-1987

Part Number		P	m		S		e
Code	M	Pitch	max	min	max	min	(min)
TBK55	2	0.4	1.6	1.35	4	3.82	4.32
	2.5	0.45	2	1.75	5	4.82	5.45
	3	0.5	2.4	2.15	5.5	5.32	6.01
	4	0.7	3.2	2.9	7	6.78	7.66
	5	0.8	4	3.7	8	7.78	8.79
	6	1.0	5	4.7	10	9.78	11.05
	8	1.25	6.5	6.14	13	12.73	14.38
	10	1.5	8	7.64	17	16.73	18.9
	12	1.75	10	9.64	19	18.67	21.1
	16	2.0	13	12.3	24	23.67	26.75
	20	2.5	16	14.9	30	29.16	32.95
	24	3.0	19	17.7	36	35	39.55



Please order as shown

Part Number		P	m
Code	M	Pitch	
TBK55	4	0.7	3.2
	5	0.8	4
	6	1.0	5

TBK55—M4



Discount price	
Per	1~99 100~
Price	100% Additional quotation



Delivery	
Per	1~99 100~
Price	100% Additional quotation