



Antivibration,Non-Slip Leveling Mounts

Fixed
Heavy Load

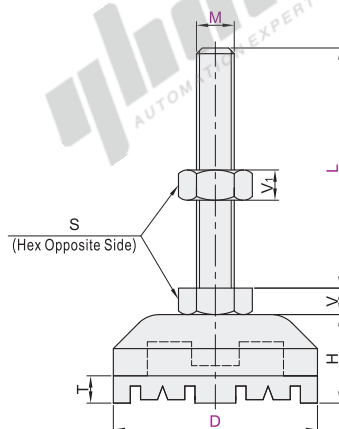

The first perspective

- ① Since the steel on the market has a gradient of 5mm and there are tolerances, the tolerance of the machined base -2~0mm is a reasonable range.
- ② Compared with nitrile rubber (NBR), chloroprene rubber (CR) has better weather resistance and certain flame retardancy. Nitrile rubber (NBR) has better oil resistance and wear resistance, and can be chosen according to different usage scenarios.

Part Number		M	L	Thread Pitch	S	H	T	V	V1	Load (kg)	Reference Weight (kg/pcs)
Code	D										
WAD86 WAD87	60	10	75	1.5	17			7	8	700	0.32
			100								0.33
			75								0.34
		12	100	1.75	19			8	10	1000	0.36
			125								0.38
			150								0.40
			75	2	24	26	8				0.44
			100								0.45
		16	125					10	13	1200	0.51
			150								0.54
			200								0.57



Please order as shown

Part Number		M	L	Thread Pitch
Code	D			
WAD86	60	10	100	2

WAD86—D60—M16—L100



Discount price			
Per	1~9	10~	
Price	100%	Additional quotation	



Delivery	
	2