


Swivel, Rubber Base → Antivibration Leveling Mounts

Extra Heavy Load

Code	Type	Material			Surface Treatment	
		Bottom Shell	Bolt	Bottom	Bottom Shell	Bolt
WAG71	Rubber Base	SUS304	SUS304	Rubber	—	—
WAG73		S45C	S45C		Zinc-plated	Zinc-plated

① Since the steel on the market has a gradient of 5mm and there are tolerances, the tolerance of the machined base -2~0mm is a reasonable range.

② The load of the universal leveling mount is vertical static load value. When calculating the load value, the safety factor needs to be adjusted according to the actual scenario.

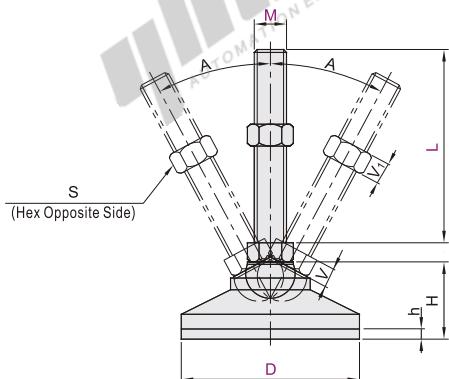

The first perspective

Part Number		M	L	Thread Pitch	S	V	V1	H	h	A	Load (Kg)	Reference Weight (Kg/pcs)
Code	D											
WAG71 WAG73	100	100									2000	0.64
		125										0.67
		20	150	2.5	30	13	16					0.7
		20	200									0.74
		20	250									0.8
		24	100						48	10	30°	
		24	125									0.7
		24	150	3	36	16	19					0.74
		24	200									0.78
		24	250									0.82
												0.88



Please order
as shown

Part Number	M	L	Thread Pitch
WAG71	100	20	2.5
	125	20	
	150	20	

WAG71—D100—M20—L100



Discount price
Per 1~9
Price 100%
Additional
quotation



Delivery
2