

Vacuum Ejector



◀ Square, Built-In Silencer One-Touch Fitting



Code	Type		
WED51	Square	One-Touch Couplings	Built-In Silencer

Specification

Applicable Fluid	Air
Operating Pressure Range(Mpa)	250~600
Rated Supply Pressure(Mpa)	700
Operating Temperature Range(°C)	5~60
Lubrication	Not Required

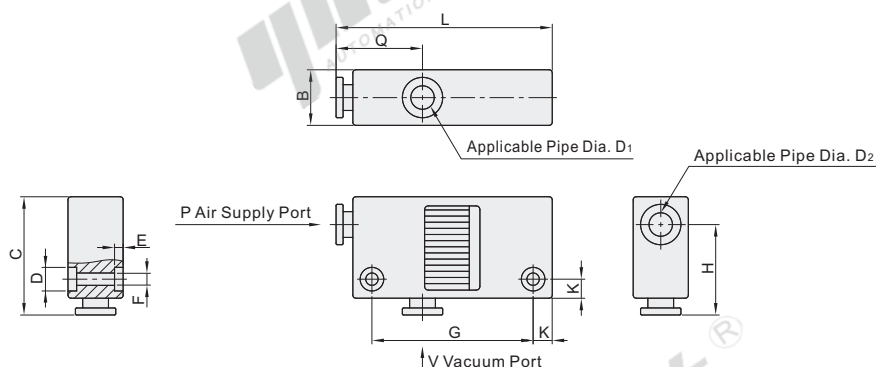

Part Number Code	Nozzle Dia.	Ultimate Vacuum (kPa)		Tube Size		L	B	C	D	E	F	G	H	Q	K	Ultimate Vacuum Flow (l/min)	Flow Consumption (l/min)
				Vacuum Port D ₁	Air Supply Port D ₂												
WED51	0.5	S	-88	Ø6	Ø6	60	16	31	5.8	2	3.2	47	22	24	5	5	13
		L	-48													8	
	0.7	S	-88			60	16	31	5.8	2	3.2	47	22	24	5	12	23
		L	-48													20	
	1.0	S	-88			63	18	32	5.8	2	3.2	50	23	26	5	24	46
		L	-48													34	
	1.3	S	-88	Ø10	Ø8	78	23	38.5	7.5	3	4.2	61	27.5	28	7	40	78
		L	-48													70	



Please order
as shown

Part Number	Ultimate Vacuum
Code	Nozzle Dia.
WED51	0.5
	L

WED51-0.5-S



Discount price
Per
1~9
10~
Price
100%
Additional quotation



Delivery
10