

Rod Control Lock

Key Drive Type Three Points



Code	Type	Cylinder Lock	Material		Surface Treatment		Reference Weight (kg)
			Housing	Cam	Housing	Cam	
XAU21	Key Drive Type	Double Bit	ABS	Q235	Spray Paint	—	0.206
XAU22				SUS304	(Silver)	—	0.41


Features:

- Without handle, key rotated 90 to realize the open and the lock function;
- The lock point is variable;
- Can open the door with left or right rotation;
- IP protection grade IP40.
- Three-point locking is firm and reliable


The hole size of the lock tongue: $\square 7 \times 7$

Accessories: 2 keys.


XAU21

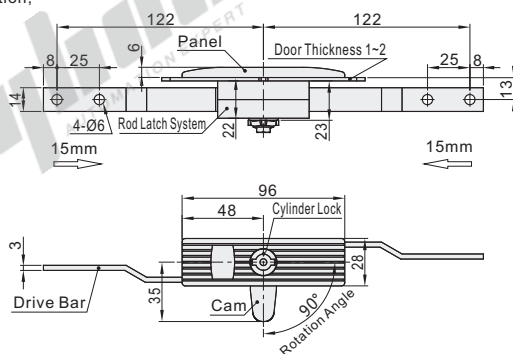

Cut Out Dimensions




XAU22

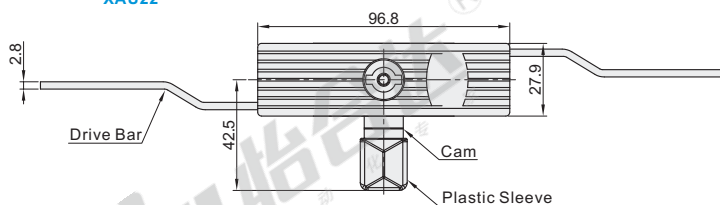


Other dimensions are the same as XAU21.

Accessories: Rod Latch System(Zinc-plated Steel)

A Type

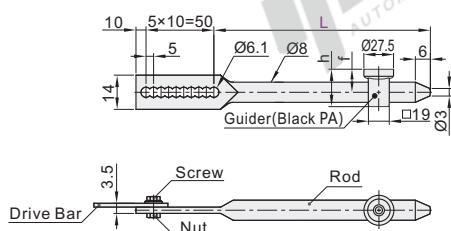


B Type

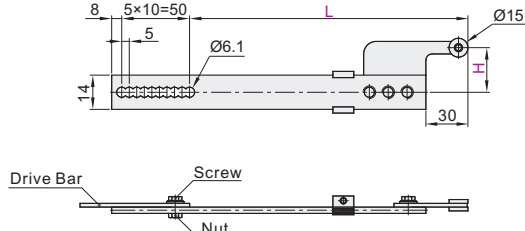

Assembly method: Use screws to connect and fix the flat drive bar. The length of the connecting rod can be adjusted by charging the fixing hole, and each hole can be adjusted by 5mm.

The guide piece is screwed on M6×L16 welding screws or countersunk screws.



Part Number		L		H		h		f	
Code	Rod Latch System								
XAU21 XAU22	W(No)	—		—		—		—	
	A(A-Type)	500		—		32		24	
		500A		—		38		30	
		500B		—		42		34	
		1000		—		32		24	
	B(B-Type)	1000A		—		38		30	
		1000B		—		42		34	
		500		18.5 22.5 27.5 35		—		—	



Part Number	L	H
Code Rod Latch System	—	—
W(No)	—	—
A(A-Type)	500 500A	—
B(B-Type)	500 1000	18.5 22.5

XAU21—W
XAU21—A—L500
XAU21—B—L500—H18.5



Discount price	Per	1~4	5~
Price 100%	Additional quotation		



Delivery	6
----------	---