



Standard ▶ Large Head Spherical

Locating Pins

Code	Type	Tolerance Grade	Material		Hardness	Surface Treatment
			GB	Equiv.		
YFD01	Round	Dm6	9CrWMn	SKS3	Treated Hardness: 58-61HRC	—

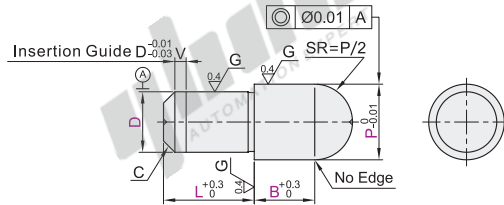

① Process hole processing conditions: $D \cdot L \cdot B \geq 4$ and $P \geq 6$. (Refer to P497 for detailed dimensions of the process hole)

The first perspective

Part Number		Dm6	0.01 mm Inc.		1 mm Inc.		0.1 mm Inc.		C	V
Code	D		P	L	B					
YFD01	1		1.50~3.00	2~3	1.5~6.0				0.1	0
	2	+0.008 +0.002	2.50~6.00	2~8					0.5	
	3		3.50~8.00	3~10						
	4		4.50~8.00	4~15	1.5~15.0					
	5	+0.012 +0.004	5.50~10.00	5~15					1	
	6		6.50~12.00	5~15						1
	8	+0.015 +0.006	8.50~15.00	5~18	1.5~30.0				1.5	
	10		11.00~17.00	5~22						
	12		13.00~20.00	6~26	3.0~30.0				2	
	13	+0.018 +0.007	14.00~20.00	7~28						
	16		17.00~27.00	8~35	5.0~30.0					2
	20	+0.021 +0.008	22.00~30.00	10~42					3	

Optional Processing



Part Number	Code	D	P	L	B	Optional Processing Code
YFD01	YFD01	2	2.5~6	2~8	1.5~15	RC
YFD01-D2-P3-L6-B6	YFD01-D2-P3-L6-B6-RC					



Code	Spec.
RC	Changes the Relief to R0.5 Ordering Code RC ① P-D≤2 not applicable.



Discount price	Per	1~19	20~
Price	100%		Additional quotation



Delivery	6
----------	---