

Single-Layer Tower Lamps


◀ Suitable for Advanced Equipment
Cylindrical

Code	Type
ZHD85	Suitable for Advanced Equipment Columnar



Features

- Simple structure, unique shape, single-layer with three colors and buzzer, high cost performance;
- The overall heat dissipation is good, aluminum alloy is used for heat dissipation to ensure stable performance and long life of the product, except for the light-emitting surface;
- Extremely resistant to yellowing, using optical cutting top angle, sandblasting and internal carving technology to refract the light to the greatest extent, making the light more gorgeous and transparent;
- Multi-color lights can be selected, and the buzzer sound is loud;
- Standard models are with Yiheda LOGO, please confirm offline if the customized LOGO is needed.

CE

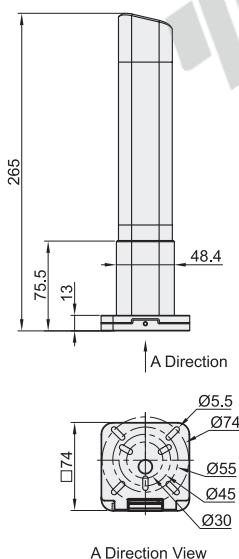

Wiring Diagram

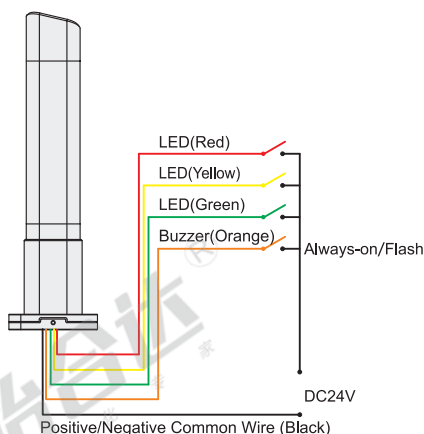

Part Number		Glow Color	Rated Voltage	Wiring Method	IP Rating
Code	Function				
ZHD85	B(Always-on)	RYG (Red Yellow Green)	DC24V	Direct Power Input Type (Total Positive/Negative Universal)	IP43
	F(Always-on With Beep)				
	D(Full-Flash)				
	E(Full-Flash With Beep)				



Please order as shown

Part Number		Glow Color	Rated Voltage
Code	Function		
ZHD85	B(Always-on)	RYG (Red Yellow Green)	DC24V
ZHD85	F(Always-on With Beep)	RYG (Red Yellow Green)	DC24V

ZHD85 — B — RYG

Performance Parameter

Input Current	40~140 mA
Power	Single color 1W, total Power 4W
Wire Length	About 0.72 M
Light	SMD 2835 LED 0.2W/PCS
Lamp Life	The light source life is 100,000 hours, and the whole lamp life is 50,000 hours
Exterior Design	Transparent
Lamp Body Color	Silver
Material	PMMA/Aluminum Alloy, Etc.
Beam Angle	360° Visibility of the whole light

Environmental Requirements

Operating Temperature	-20~45°C
Storage Temperature	-40~70°C
Operating Humidity	10~90%
Storage Humidity	10~90%