

Heaters

◀ with Flange Protector Type




Code	Type	Material					
		Sheath	Flange	Heating Wire	Lead Wire	Cable	Insulation Powder
ZIM99	with Flange Protector Type	SUS321	SUS304	Ni80Cr20	Pure Nickel Heat Resistant Wire	Ni-GB	MgO

Notice


- The maximum operating temperature is the temperature of the sheath pipe, the maximum temperature resistance of lead wire is 200°C, and the lead wire must be drawn out from the mounting hole;
- Do not expose the heating tube to burn it in the atmosphere;
- The operating temperature is below 500°C.

It is suitable for motion parts, and the cable carries needs to be customized separately.

N(No Flange)

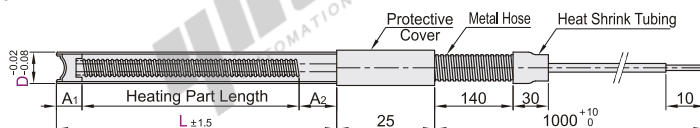


T(with Flange)

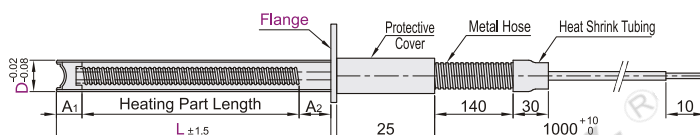


Flange Size



D=6.5



D=8/10/12



D=16



Part Number		L	Rated Power W $\pm 5\%$	Rated Voltage V $\pm 5\%$	Flange	Cold-End Length A	Heating Area Length
Code	D						
ZIM99	6.5	30	50	220	N(No Flange) T(with Flange)	A = A ₁ + A ₂ A ₁ = 7 A ₂ = 8	L - A
		40	100				
		65	150				
	8	100	200				
		150	350				
		50	120				
	10	100	250				
		150	450				
		200	550				
	12	250	650				
		50	150				
		100	300				
	16	150	550				
		200	650				
		250	1000				
		50	200				
		100	400				
		150	650				
		200	800				
		250	1300				

Length can be customized.



Part Number		L	Rated Power W $\pm 5\%$	Rated Voltage V $\pm 5\%$	Flange
Code	D				
ZIM99	8	65	100	220	N/T

ZIM99—D8—L40—W100—V220—N