
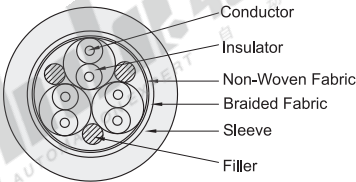


Double Twisted Shielded ▶
Signal Cable, 20 Million Times

High Flexible Drag Chain Cables

Code	Type	Shield	Insulator	Sleeve	Oil Resistant	Color
ZLH47	Signal Cable	Double Twisted Shielded	PVC	PVC	Slight Oil Resistant	Grey

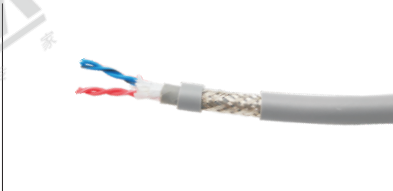

Conductor: multiple pieces of 0.08 tinned annealed copper wire twisted structure

Sell by	Length Per Roll
Roll	100m/Roll



The first perspective

Part Number		Cross-Sectional Area (mm ²)	Length (m)	Number of Cores×Cross- Sectional Area(mm ²)	Cable Outer Diameter (mm)
Code	Number of Cores				
ZLH47	2P(4)	0.2	100 (Sell by Roll 100m/Roll)	2P×0.20	7.0
	2P(4)			2P×0.30	7.5
	3P(6)	0.3		3P×0.30	7.5
	4P(8)			4P×0.30	8.0

Core Wire Color Identification

No.	Color	
1P	Red	Red and White
2P	Blue	Blue and Black
3P	Black	Black and White
4P	Green	Green and Black

Technical Parameters

Movement Lifespan	Over 20 Million Times
Rated Voltage	300V
Test Voltage	1.5KV
Bending Radius	6×OD
Operating Temperature	-20 ~ + 80℃
Standards	CE
Flammability Rating	VW-1



Please order as shown

Part Number		Cross-Sectional Area(mm ²)	Length(m)
Code	Number of Cores		
ZLH47	2P	0.2	100
		0.3	(Sell by Roll 100m/Roll)

ZLH47 - 2P - 0.2 - 100