

Flexible Drag Chain Cables



Without Shielding

Power Cable, 2 Million Times

Code	Type	Shield	Insulator	Sleeve	Oil Resistant	Color
ZLK04	Power Cable	Without Shield	PVC	PVC	Slight Oil Resistant	Black

Application:

Mainly used for control and power transmission system, widely used in sensing technology, computer and mechanical control equipment and control engineering;
There are yellow-green protective ground wires for three cores and above three cores.

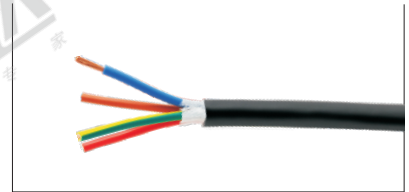

Sell by	Length Per Roll
Roll	100m/Roll

Conductor: multiple pieces of 0.15 tinned annealed copper wire twisted structure



The first perspective

Part Number	Cross-Sectional Area	Length	Number of Cores×Cross-Sectional Area(mm²)	20°C Conductor DC Resistance	Cable Outer Diameter
Code	Number of Cores	(mm²)	(m)		(mm)
ZLK04	2	0.5	2×0.5	39	5.6
	3		3G×0.5		6.0
	4		4G×0.5		6.5
	2	0.75	2×0.75	26	6.0
	3		3G×0.75		6.5
	4		4G×0.75		7.2
	2	1	2×1.0	19.5	6.4
	3		3G×1.0		6.9
	4		4G×1.0		7.8
	2	1.5	2×1.5	13.3	7.5
	3		3G×1.5		8.2
	4		4G×1.5		9.0
	2	2.5	2×2.5	7.98	9.0
	3		3G×2.5		9.8
	4		4G×2.5		11.0
	4	4	4G×4.0	4.95	12.8
	4	6	4G×6.0	3.3	14.4

Core Wire Color Identification

No.	Color
1	Blue
2	Brown
3	Yellow-Green
4	Red

Technical Parameters

Movement Lifespan	Over 2 Million Times
Rated Voltage	300V
Test Voltage	2KV
Bending Radius	7.5×OD
Operating Temperature	-20 ~ + 80°C
Standards	CE
Flammability Rating	VW-1



Please order as shown

Part Number	Cross-Sectional Area(mm²)	Length(m)
Code	Number of Cores	
ZLK04	2	100
	3	
(Sell by Roll 100m/Roll)		

ZLK04 - 2 - 0.5 - 100