
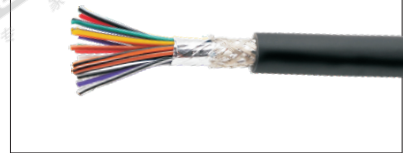


with Shield ▶
Signal Cable, 5 Million Times

Flexible Drag Chain Cables

Code	Type	Shield	Insulator	Sleeve	Oil Resistant	Color
ZLK22	Signal Cable	with Shield	PVC	PVC	Slight Oil Resistant	Black

Application:
Flexible data cables for the transmission of analog and digital signals in equipment with a control processor, or as a connection between an instrument and a control equipment.



Sell by	Length Per Roll
Roll	100m/Roll

Conductor: multiple pieces of 0.1 tinned annealed copper wire twisted structure



The first perspective

Part Number		Cross-Sectional Area (mm ²)	Length (m)	Number of Cores×Cross -SectionalArea(mm ²)	20°C Conductor DC Resistance	Cable Outer Diameter (mm)
Code	Number of Cores					
ZLK22	2	0.2	(Sell by Roll 100m/Roll)	2×0.20	95	4.4
	3			3×0.20		4.6
	4			4×0.20		4.9
	5			5×0.20		5.2
	6			6×0.20		5.6
	8			8×0.20		6.5
	10			10×0.20		7.4
	12			12×0.20		7.0
	16			16×0.20		7.8
	20			20×0.20		8.5
	2	0.3		2×0.30	71.2	4.6
	3			3×0.30		4.8
	4			4×0.30		5.2
	5			5×0.30		5.5
	6			6×0.30		5.8
	8			8×0.30		6.8
	10			10×0.30		7.8
	12			12×0.30		7.4
	16			16×0.30		8.2
	20			20×0.30		9.0

Core Wire Color Identification

No.	Color	No.	Color
1	Red	11	Red and White
2	Black	12	Black and White
3	Blue	13	Blue and Black
4	Green	14	Green and Black
5	Yellow	15	Yellow and Black
6	Orange	16	Orange and Black
7	Brown	17	Brown and Black
8	White	18	White and Black
9	Purple	19	Purple and Black
10	Grey	20	Grey and Black

Technical Parameters

Movement Lifespan	Over 5 Million Times
Rated Voltage	300V
Test Voltage	1.5KV
Bending Radius	7.5×OD
Operating Temperature	-20 ~ + 80°C
Standards	CE
Flammability Rating	VW-1



Please order as shown

Part Number		Cross-Sectional Area (mm ²)	Length (m)
Code	Number of Cores		
ZLK22	2	0.2	100
	3	0.2	(Sell by Roll 100m/Roll)

ZLK22-2-0.2-100