



Without Shielding ▶

Signal Cable, 5 Million Times

Flexible Drag Chain Cables


Code	Type	Shield	Insulator	Sleeve	Oil Resistant	Color
ZLK24	Power Cable	Without Shield	PVC	PVC	Slight Oil Resistant	Black

Application:
Mainly used for control and power transmission system, widely used in sensing technology, computer and mechanical control equipment and control engineering;
There are yellow-green protective ground wires for three cores and above three cores.

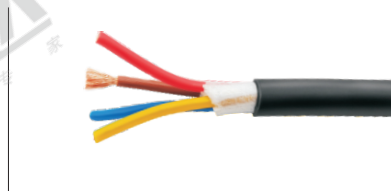

Sell by	Length Per Roll
Roll	100m/Roll

Conductor: multiple pieces of 0.1 tinned annealed copper wire twisted structure



Part Number		Cross-Sectional Area (mm²)	Length (m)	Number of Cores×Cross-Sectional Area(mm²)	20°C Conductor DC Resistance	Cable Outer Diameter (mm)
Code	Number of Cores					
ZLK24	2	0.5	100 (Sell by Roll 100m/Roll)	2×0.5		5.8
		0.75		4G×0.5	39	6.8
	4	1		4G×0.75	26	7.2
		1.5		4G×1.0	19.5	7.8
		2.5		4G×1.5	13.3	8.9
				4G×2.5	7.98	10.8

Core Wire Color Identification

No.	Color
1	Blue
2	Brown
3	Yellow-Green
4	Red

Technical Parameters

Movement Lifespan	Over 5 Million Times
Rated Voltage	300V
Test Voltage	1.5KV
Bending Radius	7.5×OD
Operating Temperature	-20 ~ + 80°C
Standards	CE
Flammability Rating	VW-1



Part Number		Cross-Sectional Area(mm²)	Length(m)
Code	Number of Cores		
ZLK24	2	0.5	100
	4		(Sell by Roll 100m/Roll)

ZLK24 - 2 - 0.5 - 100

