

# EU Standard 30 Series Extrusion Accessories- Sealing Part


After loading panel seat/After loading panel batten

| Code      | Type                       | Material | Surface Treatment/Color         |
|-----------|----------------------------|----------|---------------------------------|
| AMH01-308 | After loading panel seat   | A6063-T5 | Sandblast Oxidation             |
| AMH71-308 | After loading panel batten | TPV      | light gray (similar to RAL7001) |
| AMH72-308 |                            |          | Black                           |

Used for fix plexiglass or other panels.

After loading panel seat


AMH01-308



After loading panel batten

AMH71-308

AMH72-308



| Code      | L       | Meter weight g/m (theoretical value) |
|-----------|---------|--------------------------------------|
| AMH01-308 | 50~4000 | 130                                  |

AMH01-308 Maximum length of product: 4 meters/piece.


Maximum operating length: 4000mm.

Surface treatment can be customized.

| Code      | Minimum unit | Weight(g/m) |
|-----------|--------------|-------------|
| AMH71-308 | 1m           | 70          |
| AMH72-308 |              |             |

Order quantity×minimum unit(1m)=actual length in meters.

Max length of AMH71/72-308 : 100 meter/roll.




The first perspective

EX

Example

Exploded drawing

Assembly drawing

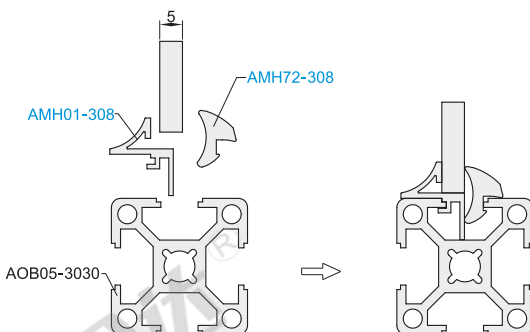

Please order as shown

Code

AMH71-308

AMH72-308

Code

AMH01-308

AMH01-308 — L450

Quotation

Way

