



Code	Type	Material	Surface Treatment
ACC31-4010	Extrusion connecting plate	SUS304	Single side brushed


① Used for high strength connection of linear, cross shaped, L-shaped and T-shaped structures.

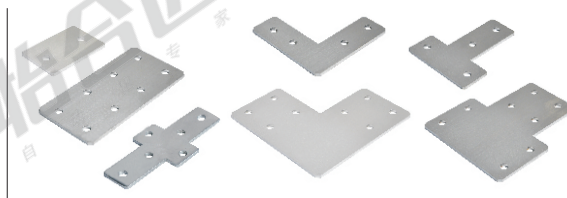


ACC31-4010-Y-4040




ACC31-4010-Y-4080C




ACC31-4010-Y-4080

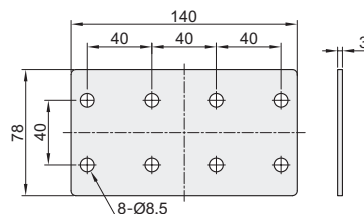


ACC31-4010-X-4040




ACC31-4010-X-4080

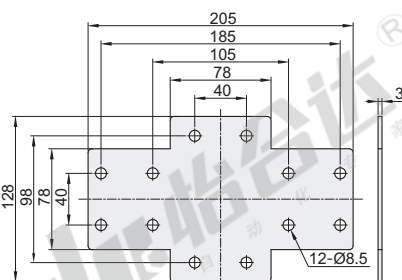


ACC31-4010-L-4080





ACC31-4010-L-4040



ACC31-4010-T-4040



ACC31-4010-T-4080

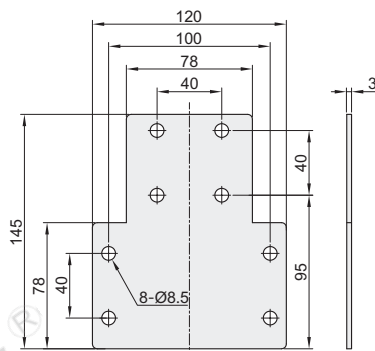

Code	Weight(g/pcs)
ACC31-4010-Y-4040	50
ACC31-4010-Y-4080	243
ACC31-4010-Y-4080C	120
ACC31-4010-X-4040	160
ACC31-4010-X-4080	351


Code	Weight(g/pcs)
ACC31-4010-L-4040	129
ACC31-4010-L-4080	404
ACC31-4010-T-4040	116
ACC31-4010-T-4080	297



☑ Code ACC31-4010-Y-4040-SET-OB

Add processing project	Code	Spec.
Equipped with suitable bolt, T nuts, washer and spring washer	SET-OB	When SET is specified, it is equipped with bolts, nuts and washers for fixing extrusion connecting plate to extrusion(Example) Bolt: AID31-M8-L12 T nut: AHC21-4010-M8 Washers: AIK31-8 Spring washer: AIH21-8

☑ Usage example of cross connecting plate

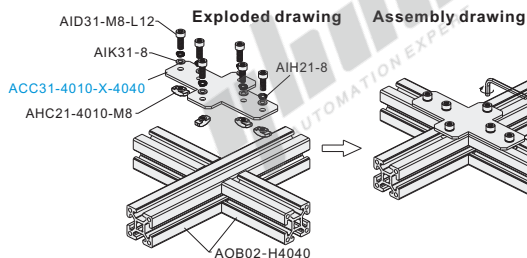

Code
ACC31-4010-Y-4040
ACC31-4010-Y-4080
ACC31-4010-X-4040

Quotation Way

