


Width L=25~100, Crowned ▶
Width L=50~100, Crosspiece Groove Straight ▶

Idlers for Flat Belts

☑ Crowned

Code	Type	Material	Surface Treatment
ENJ21	Crowned	Aluminum Alloy	Fine Sand Blast Anodizing
ENJ26	No Flange	Blue POM	—

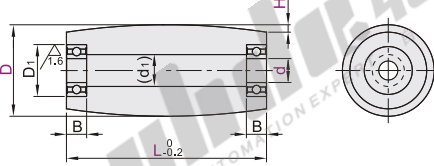

☑ Bearing Precision: GB/T 307.1 Class 0
Equivalent to: JIS B 1514 Class 0

① During the movement of POM material pulleys and belts abrasion may occur due to factors such as mechanism tension, start and stop, belt hardness, and belt friction. If there are special environmental conditions, please contact Yiheda.

① Bearings are press-fitted.

① d1 size just for reference, will not effect the usage of the idle.

① If you need to replace the sealed bearing in special environment (clean environment, etc.), please contact Yiheda.

The first perspective

Part Number		d	1 mm Inc.	H	(d ₁)	Bearing Dimensions		
Code	D		L			No.	D ₁	B
ENJ21 ENJ26	15	5			7	BAF675ZZ	8	2.5
		6			9	BAF676ZZ	10	3
	20	6			10	BAF686ZZ	13	5
		8				BAF678ZZ	12	3.5
	25	6			10	BAF696ZZ	15	
		8				BAF688ZZ	16	5
		8				BAF698ZZ	19	
		30	10	25~100	0.3	15	BAY6900ZZ	22
	12		BAY6901ZZ				24	
		10		0.5		BAY6900ZZ	22	
		12				BAY6901ZZ	24	6
		15			17	BAY6902ZZ	28	7
		8				BAF628ZZ	24	
		10			17	BAF6000ZZ	26	8
		12				BAY6901ZZ	24	6
		15			22	BAF6902ZZ	28	
		20				BAY6804ZZ	32	7

Part Number		d	1 mm Inc.	H	(d ₁)	Bearing Dimensions			
Code	D		L			No.	D ₁	B	
ENJ21 ENJ26	50	10			17	BAY6200ZZ	30	9	
		12			22	BAY6001ZZ	28	8	
		15			17	BAY6902ZZ	28	7	
		20				BAY6904ZZ	37		
		25			27	BAY6905ZZ	42	9	
	60	12		0.3		BAY6201ZZ		10	
		15	25~100			22	BAY6002ZZ	32	9
		20		0.5			BAY6904ZZ	37	
		25					BAY6905ZZ	42	9
		30			32	BAY6906ZZ	47		
	80	25					BAY6205ZZ	52	15
		30				41	BAY6006ZZ		13
		35					BAY6907ZZ	55	10



Part Number	D	d	L	H
Code	D	d	L	H
ENJ21	15	5	25~100	0.3
ENJ26	15	6	25~100	0.5

ENJ21—D15—d6—L50—H0.3



● Discount price


Per	1~5	6~
Price	100%	Additional quotation



6

☑ Crosspiece Groove Straight


Code	Type	Material	Surface Treatment
ENJ11	Crosspiece Groove Straight	Aluminum Alloy	Fine Sand Blast Anodizing

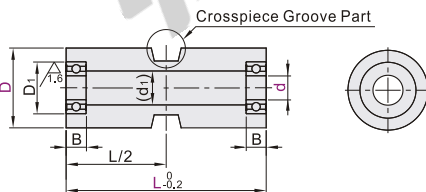

☑ Bearing Precision: GB/T 307.1 Class 0
Equivalent to: JIS B 1514 Class 0

① If you need to replace the sealed bearing in special Environment (clean environment, etc.), please contact Yiheda.


☑ Crosspiece Groove Part



① Bearings are press-fitted.

① d1 size just for reference, will not effect the usage of the idle.

☑ Crosspiece Shape and Pulley Relief Dimensions reference drawing.

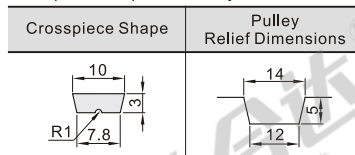

① For other specifications, please refer to the flat belt information.



Part Number	d	1 mm Inc.	0.1 mm Inc.				(d ₁)	Bearing Dimensions		
Code	D	L	X	Y	Z	No.		D ₁	B	
ENJ11	40	8					17	BAF628ZZ	24	8
		10						BAY6000ZZ	26	6
		12						BAY6901ZZ	24	6
	50	15						BAY6902ZZ	28	7
		20	50~100	10.0~16.0	5.0~15.0	6.0~8.0	22	BAY6804ZZ	32	7
		10					17	BAY6200ZZ	30	9
		12					22	BAY6001ZZ	28	8
		15					17	BAY6902ZZ	28	7
		20					27	BAY6904ZZ	37	9
	25	BAY6905ZZ						42	9	

Part Number		d	1 mm Inc.	0.1 mm Inc.			(d1)	Bearing Dimensions		
Code	D		L	X	Y	Z		No.	D ₁	B
ENJ11	60	12					22	BAY6201ZZ	32	10
		15						BAY6002ZZ		9
		20						BAY6904ZZ	37	
		25	50~100	10.0~16.0	5.0~15.0	6.0~8.0	32	BAY6905ZZ	42	9
		30						BAY6906ZZ	47	
		35						BAY6205ZZ	52	15
	80	30					41	BAY6006ZZ	55	13
		35						BAY6907ZZ		10



Part Number	D	d	L	X	Y	Z
Code	D	d	L	X	Y	Z
ENJ11	40	10	50~100	10.0~16.0	5.0~15.0	6.0~8.0

ENJ11—D40—d12—L50—X10—Y6—Z5





Discount price

Per	1~5	6~
Price	100%	Additional quotation



6