



Keyless Bushings

◀ Stepped Type-With Centering Function

Code	Type	Material	Surface Treatment
EUX16	Stepped Type With Centering Function	S45C	—



※ Screw Hole for Removal

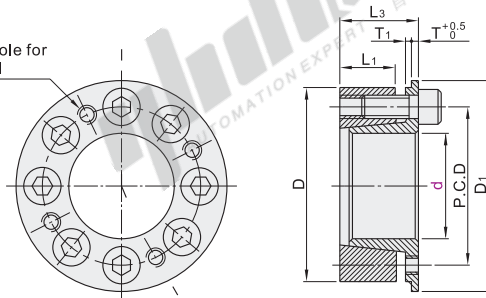

※ Thread diameter of screw hole for removal is the same as that of locking screw.

Part Number		D	D ₁	P.C.D	L ₁	L ₃	T	T ₁	Locking Screw		Max. Allowable Torque (N·m)	Allowable Thrust Load (kN)	Screw Tightening Torque (N·m)	
Code	d								M×L	Qty.				
EUX16	5	16	18.5	11.7	8	13	1.8	1.2	M3×L10	4	7	2.8	1.9	
	6	19	21.5	14	9	14.3	2.0	1.3	M4×L12		14	4.67		
	8	21	23.5	15.4	9.3	14.6					22	5.6		
	10	23	25.5	17.5	9.5	14.8	2.0	1.3			25	5.6		
	11	24	26.5	18.4		15.8				30	5.6			
	12	26	28.5	20.2	10.5	18.0			50	8.41				
	14	28	30.5	22.2			1.5	6	65	9.46	3.9			
	15	29	31.5	23.2	11.5	19.0	70		9.46					
	16	30	33.0	24.2	12.0	19.6	2.5		M4×L15	75	9.46			
	17	31	33.5	25.2	12.5	20.1	1.6			110	12.6			
	18	32	34.5	26.2				115		12.6				
	19	33	35.5	27.2				120		12.6				
	20	38	42.0	30.8				15.3	24.1	3.0	220	21.6		
	22	40	44.0	32.8	290	26								
	24	42	46.0	34.8	16.3	25.1	320				26			
	25	43	47.0	35.8	17.3	26.1	1.8				M5×L18	350	27.2	8.8
	28	46	50.0	38.8				380	27					
	30	48	52.0	40.8				3.5		10	410	27		
	32	50	54.0	42.8							18.3	27.6	440	27
	35	57	62.0	48.4	19.5	30.0	8				720	41.1		
	38	60	65.0	51.4	20.0	30.5					10	770	40.2	
	40	62	67.0	53.4	20.5	31.0		4.0	810	40.2				
	42	64	69.0	55.4					850	40.2				
	45	67	72.0	58.4			21.0		31.5	2.0		M6×L20	1200	52.9
	48	70	75.0	61.4							32.0	4.5	12	1200
	50	72	77.0	63.4	21.5	32.5		14			1500		56.3	
	55	77	83.0	68.4							1600		56.3	
	60	82	87.0	73.4			22.0		33.5	5.0	15		1900	60.3
	65	87	92.0	78.4								2000	60.3	



Please order as shown

Part Number	D	D1
Code	d	
EUX16	10	23
	11	24

EUX16—d11



Example



Discount price

Per	1~4	5~
Price	100%	Additional quotation



Delivery

6

