

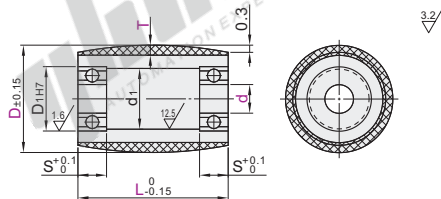


Rollers

Lining Thickness Selectable Straight(with Lining)

Code	Material			Hardness
	Crowned	Core	Bearing	
QAF61		SUS304		Shore A90
QAF71				Shore A90
QAF72		A5052	Steel	Shore A70
QAF73				Shore A50

Urethane may discolor over time, but there is no effect on physical properties.



The first perspective

Part Number	d	L	T	D1	d1	S	Use Bearings
Code	D	10 mm Increment					
QAF61 QAF71 QAF72 QAF73	40	8	5	19	14.8	6	698ZZ×2
		10		22	17.8		6900ZZ×2
		12		28	23.8		6001ZZ×2
	50	15	5	32	27.8	8	6002ZZ×2
		12		28	23.8		6001ZZ×2
		20		32	27.8		6002ZZ×2
	60	15	5	42	25.8	12	6004ZZ×2
		20		32	27.8		6002ZZ×2
		25		42	25.8		6004ZZ×2
	80	20	5	47	40.8	12	6005ZZ×2
		25		42	35.8		6004ZZ×2
		30		47	40.8		6005ZZ×2
	100	25	10	55	47.8	13	6006ZZ×2
		30					



Optional Processing

Code	Spec.
EP	Change to Black Anti-static Urethane Ordering Code EP Change ordinary urethane to anti-static urethane. Surface resistance values of polyurethane with hardness Shore A90 and Shore A70 are $10^4 \sim 10^8 \Omega \cdot M$. Surface resistance value of polyurethane with hardness of Shore A50 is $10^3 \sim 10^6 \Omega \cdot M$.



Please order as shown

Part Number	d	L	T
Code	D		
QAF61	40	20~50	5
QAF71	50	20~100	5

QAF61—D40—d8—L30—T5

Optional Processing

Part Number	d	L	T	Optional Processing Code
Code	D			
QAF61	40	20~50	5	EP
QAF71	50	20~100	5	EP

QAF61—D40—d8—L30—T5—EQ



Discount price

Per	1~9	10~
Price	100%	Additional quotation



Delivery

12