


Rollers

with Keyway
Straight(with Lining)

Code	Material		Hardness
	Core	Lining	
QAK01	SUS304	Urethane (Natural Color)	Shore A90
QAK02			Shore A70
QAK03			Shore A50
QAK04			Shore A90
QAK05	A5052		Shore A70
QAK06			Shore A50


Urethane may discolor over time, but there is no effect on physical properties.

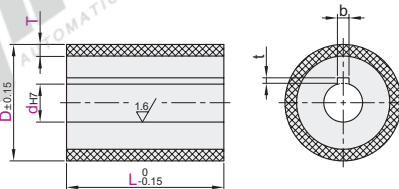

The first perspective

Part Number		d _{H7}	L 1 mm Increment	T	M
Code	D				
QAK01 QAK02 QAK03 QAK04 QAK05 QAK06	20	8	20~100	3	M3
	25	8 10 12			
	30	8 10 12 15			
	35	10 12 15 20			
	40	10 12 15 20 25		5	M4
	50	10 12 15			
	50A	12 15 20		10	M5
	60	15 20 25			
	80	20 25 30			
	100				M6

Keyway Dimensions



Shaft Hole Dia. d	b		t	
	Reference Diameter	Tolerance (JS9)	Reference Diameter	Tolerance
8	3	±0.0125	1.4	
10	4		1.8	+0.1 0
12	5	±0.0150	2.3	
15	6		2.8	
20	8	±0.0180	3.3	+0.2 0
25				
30				



Optional
Processing

Code	Spec.
EP	Change to Black Anti-static Urethane
	Ordering Code: EP ① Change ordinary urethane to anti-static urethane. ② Surface resistance values of polyurethane with hardness Shore A90 and Shore A70 are 10 ⁹ ~10 ¹² Ω·M. ③ Surface resistance value of polyurethane with hardness of Shore A50 is 10 ⁹ ~10 ¹⁰ Ω·M.



Please order
as shown

Part Number		dH7	L	T
Code	D			
QAK01	20	8	20~100	3
QAK02	25	8 10 12		
QAK02 — D25 — d10 — L20 — T3				



Discount price		
Per	1~9	10~
Price	100%	Additional quotation

Optional Processing

Part Number		dH7	L	T	Optional Processing Code
Code	D				
QAK01	20 8	20~100	3	EP	
QAK02	25 8 10 12				

QAK02 — D25 — d10 — L20 — T3 — EP

Delivery	
Per	12