

Set Screw Type ▶ Stepped Type(with Lining)

Rollers





Code	Type		Material		Hardness
			Core	Lining	
QBF01	Stepped Type	Set Screw Type	SUS304	Urethane (Natural Color)	Shore A90
QBF02					Shore A70
QBF03					Shore A50

- ① Urethane may discolor over time, but there is no effect on physical properties.
② Urethane is baked on the outer circumference of the core material.

D15/20

D25~50

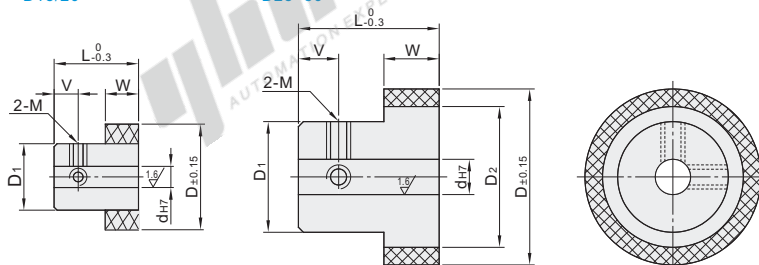

The first perspective

Part Number		D	d	D1	D2	V	L	W	M
Code	No.								
QBF01 QBF02 QBF03	15	15	4	10	—	3	12	6	3
	15A		5						
	20	20	4	16	20	6	20	8	4
	20A		5						
	25	25	6	20	24	6	25	10	4
	25A		8						
	30	30	6	25	36	7.5	25	10	4
	30A		8						
	35	35	8	20	28	7.5	25	10	4
	35A		10						
	40	40	8	25	36	7.5	25	10	4
	40A		10						
	50	50	10	30	42	7.5	25	10	4
	50A		12						



Optional Processing

Code	Spec.	
EP	Change to Black Anti-static Urethane	Ordering Code EP
	① Change ordinary urethane to anti-static urethane. ② Surface resistance values of polyurethane with hardness Shore A90 and Shore A70 are $10^3 \sim 10^5 \Omega \cdot M$. ③ Surface resistance value of polyurethane with hardness of Shore A50 is $10^3 \sim 10^4 \Omega \cdot M$.	



Please order as shown

Part Number		D	d
Code	No.		
QBF01	15	15	4
QBF02	15A	15	5

QBF01—15

Optional Processing

Part Number		Optional Processing Code
Code	No.	
QBF01	15	EP
QBF02	15A	EP

QBF01—15—EP



Discount price			
Per	1~9	10~	Additional quotation
Price	100%		



Delivery
12