



15 series ▶
20 series ▶

General Aluminum Alloy Extrusion

15 series

Code	Material	Surface Treatment
AOB02	A6063-T6	Alkaline Sand Oxidation

- ⓘ The fracture section haven't do oxidation.
- ⓘ Maximum length of use: 3800~3850mm;
The whole standard length: 4000mm.
- ⓘ Surface treatment can be customized.



Part Number		L	Section dimension	Weight per meter Kg/m (Theoretical value)	Sectional area (mm ²)	Moment of inertia of section		Bending section modulus	
Code	No.	0.5 mm Inc.				I _x	I _y	W _x max (mm ³)	W _y max (mm ³)
AOB02	H1530B	50~4000	15×30	0.68	246.41	0.70×10 ⁴	1.47×10 ⁴	929.87	978.33



Part Number	L
Code	No.
AOB02	H1530B
	50~4000

AOB02 — H1530B — L400




20 series


Code	Material	Surface Treatment
AOB05	A6063-T5	Sandblast Oxidation

- ⓘ The fracture section haven't do oxidation.
- ⓘ Maximum length of use: 3800~3850mm;
The whole standard length: 4000mm.
- ⓘ Surface treatment can be customized.



AOB05-2040M



AOB05-2080T

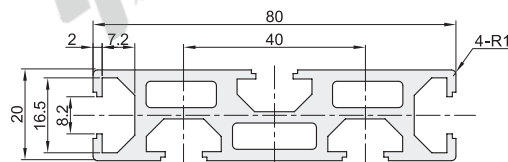

AOB05-20120T

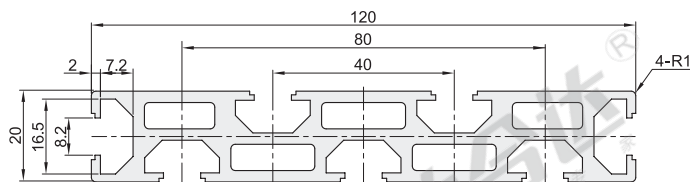

Part Number		L	Section dimension	Weight per meter Kg/m (Theoretical value)	Sectional area (mm ²)	Moment of inertia of section		Bending section modulus	
Code	No.	0.5 mm Inc.				I _x	I _y	W _x max (mm ³)	W _y max (mm ³)
AOB05	2040M	50~4000	20×40	1.26	456.03	2.25×10 ⁴	4.92×10 ⁴	2247.00	2460.60
	2080T		20×80	1.94	705.28	2.95×10 ⁴	36.02×10 ⁴	2817.50	9004.78
	20120T		20×120	2.89	1048.66	4.27×10 ⁴	123.99×10 ⁴	4137.77	20665.22



Part Number	L
Code	No.
AOB05	2040M
	2080T
	20120T

AOB05 — 2040M — L400

