


Door stopper

Code	Type	Material	Surface Treatment
AKB31	Door stopper	Stainless steel	—

Used for locating and adsorption of doors, installed on the both inner side of aluminum extrusion doors, the locating plate is selected for use according to the extrusion dimension.

AKB31

(With adsorption plate)

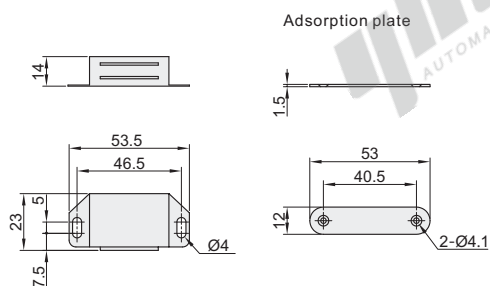


Code	Attraction(N)	Weight(g/pcs)
AKB31	40	31.7



EX

Example

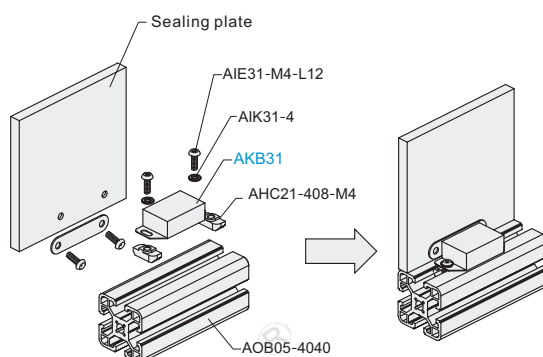

Magnetic buckle/Pin locating plate



Code	Type	Material	Surface Treatment
AKF23	Magnetic buckle/Pin locating plate	Carbon steel	Chrome

Install on the outer frame of aluminum extrusion door, and used with magnetic buckle and pin.

Thickness of T20/T35 is 2.

AKF23-T0


AKF23-T5
AKF23-T10
AKF23-T15
AKF23-T20
AKF23-T25
AKF23-T30
AKF23-T35




EX

Example

Magnetic buckle example

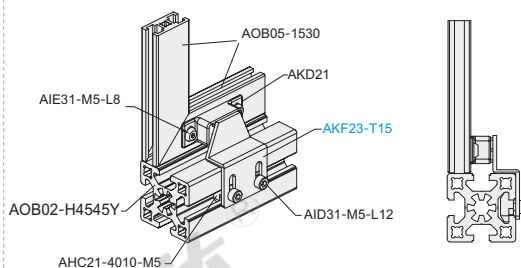

Pin example

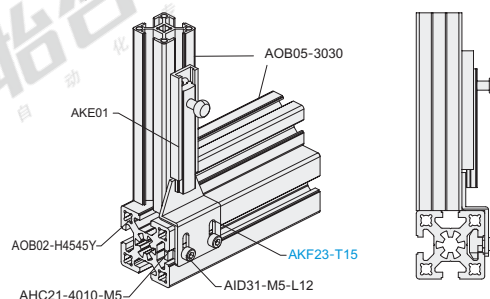

Part number		Applicable range	Weight(g/pcs)	
Code	T			
AKF23	0	Used when the width difference is 15mm between door outer frame and inner door profile	For magnetic buckle	33.3
	5	Used when the width difference is 10/20mm between door outer frame and inner door profile	For pin	33.3
	5	Used when the width difference is 10/20mm between door outer frame and inner door profile	For magnetic buckle	26.8
	10	Used when the width difference is 5mm between door outer frame and inner door profile	For pin	26.8
	10	Used when the width difference is 5/25mm between door outer frame and inner door profile	For magnetic buckle	38.6
	15	Used when the width difference is 10mm between door outer frame and inner door profile	For pin	38.6
	15	Used when the width difference is 30mm between door outer frame and inner door profile	For magnetic buckle	41.9
	20	Used when the width difference is 15mm between door outer frame and inner door profile	For pin	41.9
	20	Used when the width difference is 20mm between door outer frame and inner door profile	For pin	42.5
	25	Used when the width difference is 25mm between door outer frame and inner door profile	For pin	49.5
30	Used when the width difference is 30mm between door outer frame and inner door profile	For pin	49.3	
35	Used when the width difference is 35mm between door outer frame and inner door profile	For pin	53.5	