


General Aluminum Alloy Extrusion

Optical Fiber Mounting Plate


Code	Type	Material	Surface Treatment
ATS05	Optical fiber mount	A6063-T5	Sandblast Oxidation

- The fracture section haven't do oxidation.
- Maximum length of use of optical fiber mounting plate:2000m.
- Surface treatment can be customized.


■ L length tolerance

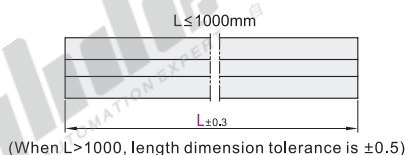



ATS05-609



ATS05-619



ATS05-169



Part Number		L 1 mm Inc.	Section dimension	Weight per meter Kg/m (Theoretical value)	Sectional area(mm ²)	Moment of inertia of section	
Code	No.					t_x	t_y
ATS05	609	50~2000	6×9	0.09	31.80	0.03×10^4	0.01×10^4
	619		6×19	0.15	51.77	0.50×10^4	0.02×10^4
	169		16×9	0.14	48.30	0.09×10^4	0.05×10^4

■ Selection table of general aluminum alloy extrusion accessories

Type of notch	Applicable accessories
	The fastening nut in the groove is a standard hexagon nut TBK55-M3
	Choose EU standard 20 series extrusion accessories
	Choose EU standard 30 series extrusion accessories
	Choose EU standard 408 series extrusion accessories

Type of notch	Applicable accessories
	Choose national standard 30 series extrusion accessories
	Choose national standard 40 series extrusion accessories
	Choose EU standard 4010 series extrusion accessories



Please order as shown

Part Number		L 1 mm Inc.	Section dimension
Code	No.		
ATS05	609	50~2000	6×9
	619		6×19

ATS05—609—L350

Quotation
Way

