


Code		L Dimensional Tolerance	Material		Surface Treatment
Inner Ring	Outer Ring		GB	Equiv.	
BKP01	BKP51	0 -0.1	LF2	A5052	—
BKP06	BKP56		Q235	SS400	Black Oxide
BKP07	BKP57				Electroless Nickel Plating
BKP11	BKP61		0Cr18Ni9	SUS304	
BKP21	BKP71	+0.1 0	LF2	A5052	—
BKP26	BKP76		Q235	SS400	Black Oxide
BKP27	BKP77				Electroless Nickel Plating
BKP31	BKP81		0Cr18Ni9	SUS304	




### Inner Ring

Negative Tolerance  
BKP01/06/07/11

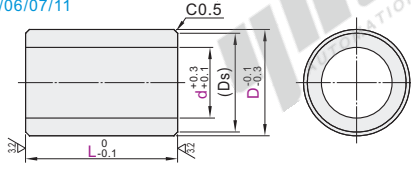


Positive Tolerance  
BKP21/26/27/31

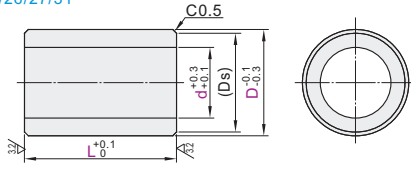


### Outer Ring

Negative Tolerance  
BKP51/56/57/61

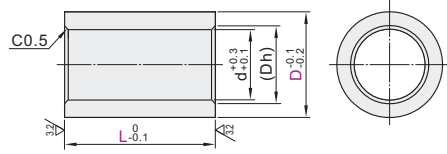

Positive Tolerance  
BKP71/76/77/81

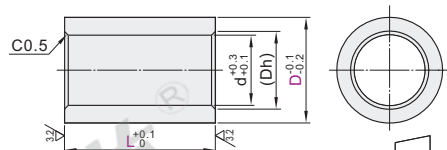

The First Perspective

### Inner Ring

Part Number	d	D	L	Ds	Applicable Bearing
Code	d	D	1 mm Inc.	Ds	
3	5			4	673ZZ/693ZZ/623ZZ
4	7			6	674ZZ/694ZZ/624ZZ
5	8			7	675ZZ/695ZZ/605ZZ/625ZZ
6	9	1.0~50.0		8	676ZZ/696ZZ/606ZZ/626ZZ
8	10			9	678ZZ
	11			10	678ZZ/698ZZ/608ZZ/628ZZ
	12			11	6700ZZ
10	13	1.0~100.0		12	6800ZZ
	14			13	6900ZZ/6000ZZ
	17	2.0~100.0		16	6200ZZ/6300ZZ
12	16	1.0~100.0		14	6701ZZ/6801ZZ
	15			15	6901ZZ/6001ZZ
	18			17	6201ZZ/6301ZZ
	18			17	6702ZZ/6802ZZ
	19			18	6902ZZ/6002ZZ
15	21			20	6202ZZ
	23			22	6302ZZ
	20			19	6803ZZ
	22			21	6903ZZ/6003ZZ
	24			23	6203ZZ
	26			25	6303ZZ
	23			22	6804ZZ
	25			24	6904ZZ
20	27	2.0~100.0		26	6004ZZ/6204ZZ
	29			28	6304ZZ
	28			27	6805ZZ
	29			28	6905ZZ
25	31			30	6005ZZ
	33			32	6205ZZ
	36			35	6305ZZ
	33			32	6806ZZ
	35			34	6906ZZ
30	38			37	6006ZZ
	40			39	6206ZZ
	43			42	6306ZZ
	38			37	6807ZZ
	42			41	6907ZZ
35	44			43	6007ZZ/6207ZZ
	46			45	6207ZZ
	48			47	6307ZZ
	43			42	6808ZZ
	46			45	6908ZZ
40	49	3.0~100.0		48	6008ZZ/6208ZZ
	52			51	6208ZZ
	54			53	6308ZZ
	53			52	6009ZZ
45	55			54	6209ZZ
	56			57	6010ZZ
50	60			59	6210ZZ

### Outer Ring

Part Number	D	L	d	Dh	Applicable Bearing
Code	D	0.1 mm Inc.	d	Dh	
6	4		5	6	673ZZ
7	5		6	7	674ZZ
8	6		7	8	693ZZ
10	7	1.0~50.0	8	9	623ZZ
11	8		9	10	694ZZ
13	9		10	11	624ZZ/695ZZ
14	10		11	12	605ZZ
15	11		12	13	696ZZ
16	12		13	14	625ZZ
17	13	3.0~50.0	14	15	606ZZ
19	14		15	16	626ZZ/698ZZ
19A	16		17	18	6800ZZ
21	18		19	20	6801ZZ
22	17		18	19	608ZZ/6900ZZ
24	19		20	21	628ZZ/6901ZZ
24A	21		22	23	6802ZZ
26	20		21	22	6000ZZ
26A	23		24	25	6803ZZ
28	22		23	24	6001ZZ/6902ZZ
30	24		25	26	6200ZZ
32	25		26	27	6201ZZ/6002ZZ
32A	29		30	31	6804ZZ
35	29	3.0~100.0	30	31	6202ZZ
37	31		32	33	6904ZZ
37A	34		35	36	6805ZZ
42	34		35	36	6004ZZ/6905ZZ
42A	39		40	41	6806ZZ
47	39		40	41	6204ZZ/6005ZZ/6906ZZ
47A	44		45	46	6807ZZ
52	45		46	47	6205ZZ
52A	49		50	51	6808ZZ
55	46		47	48	6006ZZ
62	55		56	57	6206ZZ/6007ZZ/6908ZZ
70	63		64	65	6207ZZ



### Inner Ring

Part Number	d	D	L
BKP01	5	14	1.0~100.0
BKP06	8	17	2.0~100.0

BKP01 — d10 — D17 — L33.5

### Outer Ring

Part Number	D	L
BKP51	6	1.0~50.0
BKP56	7	1.0~50.0

BKP51 — D6 — L20

### Optional Processing

Part Number	d	L	Optional Processing Code
BKP31	6	1.0~50.0	NC
BKP56	7	1.0~50.0	NC

BKP51 — D6 — L20 — LC



Discount price	
Per	1~9 10~
Price	100% Additional quotation



Delivery  
15



Code	Spec.
LC Negative Tolerance	<p>Change L Dimension Tolerance</p> <p>Ordering Code LC</p> <p>L<sub>0,-0.1</sub> Overall Length Tolerance</p> <p>Change to L<sub>0,-0.02</sub></p>
NC Positive Tolerance	<p>Ordering Code NC</p> <p>L<sub>0,+0.1</sub> Overall Length Tolerance</p> <p>Change to L<sub>0,+0.02</sub></p>

ⓘ When L < 3, \* marked Bearings cannot be used.