

Flanged ▶
T-Shaped ▶


Precision Cast Shaft Support

Code	Type	Material	Surface Treatment	Accessories
GFC01	Flanged	Aluminum Alloy	Clear Anodize(Matte)	Hex Socket Head Cap Screw 1pc.
GFF01	T-Shaped			





- ① Open type, the tolerance H7 of the mounting hole D is the tolerance before the opening is processed. After the opening is processed, due to internal stress release, the tolerance may increase to about H8, which does not affect customer use.
- ② The size of the slot determines whether the open-type guide shaft support is overcut (overcut means the saw blade cuts to the opposite side of the slot). The picture is for reference only.

Flanged
GFC01

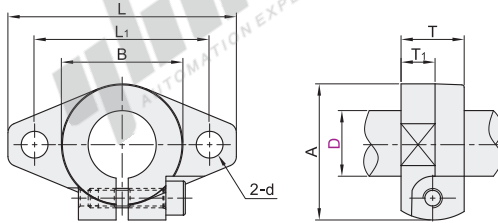

T-Shaped
GFF01

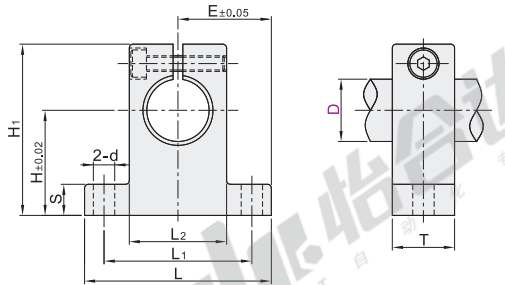

Part Number		L	A	B	L ₁	T	T ₁	d	Accessories Screws
Code	D								
GFC01	8	43	24	20	32	10	5		
	10							5.5	M4
	12	47	28	25	36	13	7		
	13								
	16	50	31	28	40	16	8		
	20	60	37	34	48	20		7	M5
	25	70	42	40	56	25	10		
	30	80	50	46	64	30	12	9	M6
	35	92	58	50	72	35	14		M8
	40	102	67	56	80	40	16	12	M10
50	122	83	70	96	50	19		M12	
60	140	95	82	112	60	23			

Part Number		H	H ₁	S	L	L ₁	L ₂	T	E	d	Accessories Screws
Code	D										
GFF01	8	20	32.8				18				
	10			6	42	32		14	21	5.5	M4
	12	23	37.5				20				
	13										
	16	27	44	8	48	38	25	16	24		
	20	31	51	10	60	45	30	20	30	6.6	M5
	25	35	60		70	56	38	24	35		
	30	42	70	12	84	64	44	28	42	9	M6
	35	50	82		98	74	50	32	49		
	40	60	96	15	114	90	60	36	57	11	M8
50	70	120	18	126	100	74	40	63	14	M12	



T-Shaped

Part Number	D	H
GFF01	8	20
GFF01—D8		



Discount price

Per	1~9	10~
Price	100%	Additional quotation

