



Code	Type	Material				Surface Treatment			
		①	③	⑥	④	①	③	④	⑥



LEB21	Precision Type Fixed Side	S45C	SUJ2	Black Oxide
-------	---------------------------	------	------	-------------

Constituting Parts



No.	Part Name	Qty.
①	Bearing Housing	1
②	Angular Contact Bearing Class 5	1 Set
③	Cover	1
④	Collar	2
⑤	Oil Seal(d<8 comes with one oil seal)	2
⑥	Clamping Nut	1
⑦	Hex Socket Head Cap Screw	2

- Do not disassemble ①, ② and ③, as they must remain assembled.
- Bearing is filled with low particle generation grease.
- Uses the preloaded JIS 5 class Angular Contact Bearings. It is recommended to use high-accuracy and high-speed precision applications.




d6~8

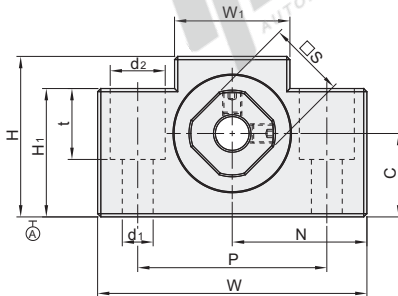

d10~20

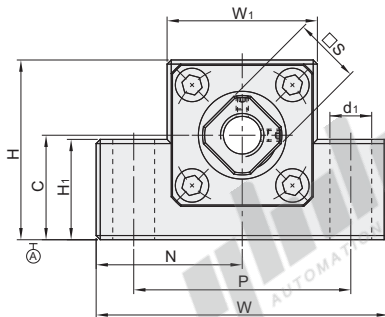

Advise Shaft End Machining Dimensions



The first perspective

Part Number																				Advise Shaft end Machining Dimensions									
Code	No.	Ød	T	T ₁	T ₂	T ₃	W	H	C 0-0.02	W ₁	H ₁	P	N ±0.02	Ød ₁	Ød ₂	t	S	Shaft diameter for oil seal Ød ₄	Ball Screws Shaft Dia.	Shaft end O.D.	Shaft end machining dimensions			Nominal Thread		Collar Length Size			
																			ØD ₁	Ød	ØA	B	E	M(Fine)	L	T ₄			
LEB21	6	6	20	5.5	22	3.5	42	25	13	18	20	30	21	5.5	9.5	11	12	9.4	8	6 ^{-0.005} _{-0.012}	4	28	8	M6×P0.75	8	5			
	8	8	23	7	26	4	52	32	17	25	26	38	26	6.6	11	12	14	11.4	10/12	8 ^{-0.005} _{-0.012}	6	32	9	M8×P1.0	10				
	10	10	24	6	29.5	6	70	43	25	36	24	52	35	9				16	14.4	12/14/15	10 ^{-0.005} _{-0.012}	8	36	15	M10×P1.0	11	5.5		
	12	12																19	15.4	14/15/16	12 ^{-0.005} _{-0.012}	10			M12×P1.0				
	15	15	25		32	5	80	49	30	41	25	60	40	11				22	20	18/20	15 ^{-0.005} _{-0.014}	12	47	20	M15×P1.0	18	6		
	20	20	42	10	50	10	95	58	30	56		75	47.5					30	25.4	25/28/30	20 ^{-0.005} _{-0.014}	17	62	25	M20×P1.0	17	11		



Please order as shown

Part Number		Ød
Code	No.	
LEB21	6	6
	8	8

LEB21 — 6





Discount price

Per	1~9	10~
Price	100%	Additional quotation



Delivery	
	2