



Hex Socket Head Cap Screws

- Extra Low Head Type
- Ultra Low Head Type

Extra Low Head Type

Code	Type		Material		Surface Treatment	Strength Class
			GB	Equiv.		
TAF52	Extra Low Head Type	Full Thread	0Cr18Ni9	SUS304	—	—

Features: Can be used without modification in locations while the heads of conventional hexagon socket head cap screws would cause an obstruction.

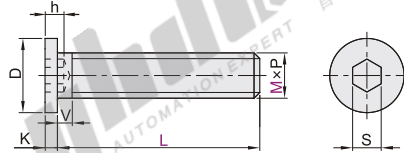

Part Number		L														P Pitch	D	K (max)	S	h(max)	V (max)				
Code	M																								
TAF52	2	3	4	5	6	8	10	12	14	16	18							0.4	4	1.5	1.3	1.2	1.2		
	2.5	3	4	5	6	8	10	12	14	16	18	20							0.45	5	1.5	1.3	1.5	1.5	
	3	3	4	5	6	8	10	12	14	16	18	20							0.5	6	1.5	1.5	2	1.6	
	4	4	5	6	8	10	12	14	16	18	20	25	30							0.7	8	1.5	2	2.5	1.6
	5	5	6	8	10	12	14	16	18	20	25	30							0.8	9	1.5	3	3	1.6	
	6	6	8	10	12	14	16	18	20	25	30							1.0	10	1.5	3	4	2.0		
	8	8	10	12	14	16	18	20	25	30	35	40	45	50	55	60	1.25	13	1.5	4	5	2.5			
	10	8	10	12	14	16	18	20	25	30	35	40	45	50	55	60	1.5	15	1.5	5	5	3			



Part Number		L					
Code	M						
TAF52	2	3	4	5	6	8	10
TAF52	2.5	3	4	5	6	8	10

TAF52 — M2.5 — L6







Discount price

Per	1~49	50~
Price	100%	Additional quotation



Ultra Low Head Type

Code	Type		Material		Surface Treatment	Strength Class
			GB	Equiv.		
TAR11	Ultra Low Head Type		0Cr18Ni9	SUS304	—	A2-70

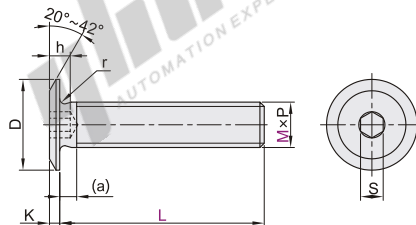

Part Number		L	P Pitch	D	K	S	h	(a)	r min
Code	M								
TAR11	2	3 4 5 6 8 10	0.4	4	0.5	1.27	1.2	1.2	
	2.5	3 4 5 6	0.45	5	0.6	1.27	1.5		0.1
	3	5 6 8 10 12 16	0.5	6	0.8	1.5	2	1.4	
	4	5 6 8 10 12 16 20 25	0.7	8	0.9	2	2.5	1.5	
	5	6 8 10 12 16 20 25	0.8	9	1	2.5	3	1.8	0.2
	6	8 10 12 16 20 25	1.0	10	1.2	3	4	2.2	0.25



Part Number		L					
Code	M						
TAR11	4	5	6	8	10	12	16
TAR11	5	6	8	10	12	16	
TAR11	6	8	10	12	16		

TAR11 — M5 — L8



Discount price		
Per	1~19	20~
Price	100%	Additional quotation

