

Economy All Stainless Steel Couplings



- ◀ Tapped, 90° Elbow/Union Tees
- ◀ Threaded, Straight/ 90° Elbow
- ◀ Threaded, Equal Diameter

☑ Tapped, 90° Elbow

Code	Type	Material	
		GB	Equiv.
XZP11	Tapped 90° Elbow	0Cr18Ni9	SUS304

☑ Specifications

Max. Operating Pressure (MPa)	3
Applicable Fluid	Pulsating Water/Still Water/ Air/Steam/Gas/Oil



Part Number		R	B	G	H
Code	Nominal				
XZP11	02	Rc1/4	19	18	27
	03	Rc3/8	22.5	21	33
	04	Rc1/2	26.5	26.5	40



Please order as shown

☑ Tapped, Elbows

Part Number	Nominal	R
Code		
XZP11	02	Rc1/4
	03	Rc3/8

XZP11-02




Discount price
Per 1~29 30~
Price 100% Additional quotation

☑ Tapped, Union Tees

Code	Type	Material	
		GB	Equiv.
XZP16	Tapped Union Tees	0Cr18Ni9	SUS304

☑ Specifications

Max. Operating Pressure (MPa)	3
Applicable Fluid	Pulsating Water/Still Water/ Air/Steam/Gas/Oil





Part Number		R	B	G	H
Code	Nominal				
XZP16	02	Rc1/4	18.5	18	28
	03	Rc3/8	22.5	21	33
	04	Rc1/2	26.5	26.5	40



Delivery 8

☑ Threaded, Straight

Code	Type	Material	
		GB	Equiv.
XZP01	Threaded Straight	0Cr18Ni9	SUS304

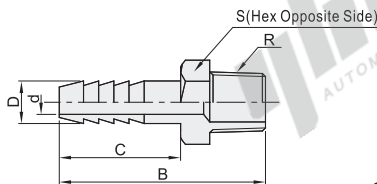

Part Number		Nominal	R	B	D	C	d	S	
Code	Applicable Tube I.D.								
XZP01	6	01	R1/8	36	7	20	3.6	12	
		02	R1/4	42		24	4	14	
	9	03	R3/8	47.5	10	25	6.2	18	
		04	R1/2	48.5		28	7.6	18	
	12	01	R1/8	56	12	32	8	22	
		02	R1/4						
		03	R3/8						
		04	R1/2						

☑ Threaded, Straight

Part Number	Applicable Tube I.D.	Nominal	R
Code			
XZP01	01	R1/8	
	02	R1/4	

XZP01-6-02

☑ Threaded, 90° Elbow

Part Number	Nominal	R
Code		
XZP06	02	R1/4
	03	R3/8


XZP06-02

☑ Threaded, 90° Elbow

Code	Type	Material	
		GB	Equiv.
XZP06	Threaded 90° Elbow	0Cr18Ni9	SUS304

☑ Specifications

Max. Operating Pressure (MPa)	3
Applicable Fluid	Pulsating Water/Still Water/ Air/Steam/Gas/Oil





Part Number		R	A	B
Code	Nominal			
XZP06	02	R1/4	12	25.5
	03	R3/8	12	28
	04	R1/2	13	30

☑ Threaded, Equal Diameter

Code	Type	Material	
		GB	Equiv.
XZQ51	Threaded, Equal Dia., Straight	0Cr18Ni9	SUS304

☑ Specifications

Max. Operating Pressure (MPa)	3
Applicable Fluid	Pulsating Water/Still Water/ Air/Steam/Gas/Oil



型号		R	A	B	D	S
代码	公称型号					
XZQ51	01	R1/8	10.5	27.5	5.5	12
	02	R1/4	13	32.5	8	15
	03	R3/8	14	35	11.5	18
	04	R1/2	16	40	15.4	22



Please order as shown

Part Number	Nominal	R
Code		
XZQ51	01	R1/8
	02	R1/4

XZQ51-01



Discount price
Per 1~29 30~
Price 100% Additional quotation



Delivery
8