


with Tapped Shank ▶ Large Flat Head


Locating Pins

Code	Type	Material		Hardness	Surface Treatment
		GB	Equiv.		
YGF41	with Tapped Shank	9CrWMn	SKS3	Treated Hardness: 58-61HRC	—

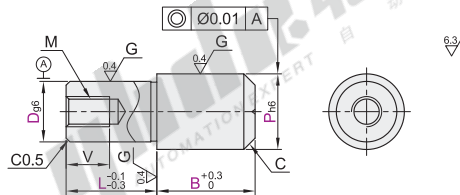

□ P Tol.

P	h6
5.50~6.00	0 -0.008
6.01~10.00	0 -0.009
10.01~18.00	0 -0.011
18.01~30.00	0 -0.013



① Process hole processing conditions: B≥4. (Refer to P497 for detailed dimensions of the process hole)

The first perspective

Part Number		0.01 mm Inc.	1 mm Inc.	0.1 mm Inc.	M	V	C
Code	Dg6	P	L	B			
YGF41	5	-0.004 -0.012	5.50~8.00	5~12	M2	3	1.0
	6		6.50~10.00	6~15	M3	5	
	8T		8.50~15.00	6~18	M4	6	1.5
	8	-0.005 -0.014		8~18	M5	8	
	10T		10.50~17.00	6~22	M4	6	
	10			10~22	M5	8	2
	12T		12.50~18.00	8~26	M5	8	
	12			12~26	M4	6	
	13T	-0.006 -0.017	13.50~20.00	8~28	M6	9	
	13			13~28	M8	10	
	16T		16.50~27.00	10~35	M6	9	3
	16			16~35	M8	12	
	20T	-0.007 -0.020	20.50~30.00	12~42	M6	9	
	20			20~42	M8	12	



Please order as shown

Part Number		P	L	B
Code	D			
YGF41	5	5.50~8.00	5~12	1.5~15
	6	6.50~10.00	6~15	1.5~15

YGF41—D6—P8—L8—B6

□ Optional Processing

Part Number		P	L	B	Optional Processing Code
Code	D				
YGF41	5	5.50~8.00	5~12	1.5~15	MA RC CN
	6	6.50~10.00	6~15	1.5~15	

YGF41—D6—P8—L8—B6—CN





Discount price	
Per	Price
1~19	20~
100%	Additional quotation



Delivery	
Per	Price
1~19	20~
100%	Additional quotation



Optional Processing

Code	MA	RC	CN														
Spec.	Adds tapped hole 	Changes the relief to R0.5 	Changes C Chamfering 														
	Ordering Code MA <table><tr><th>D</th><th>MA</th><th>V1</th></tr><tr><td>12</td><td>M4</td><td>6</td></tr><tr><td>13</td><td></td><td></td></tr><tr><td>16</td><td>M6</td><td>9</td></tr><tr><td>20</td><td></td><td></td></tr></table>	D	MA	V1	12	M4	6	13			16	M6	9	20			Ordering Code RC ❗ P-D≤2 not applicable.
D	MA	V1															
12	M4	6															
13																	
16	M6	9															
20																	