

Ø19mm Mounting Hole

High Quality, Stainless Steel

Pushbutton Switches


Code	Type	With or Without Light	Material
ZHC42	Pushbutton Switches	With Lights	Stainless Steel

CE





Light Type: E

Pin Location Diagram

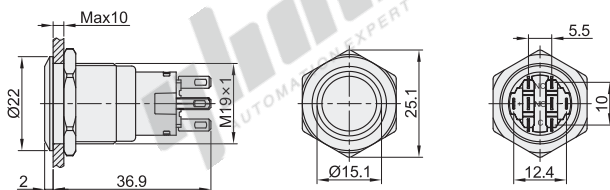

Light Type: F

Pin Location Diagram

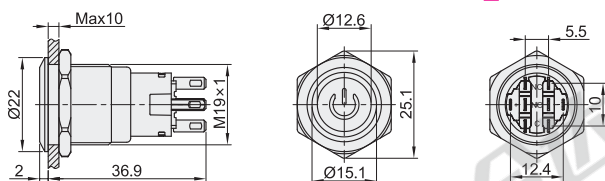

Part Number		Button Shape	Contact Type	Light Type	Light Color	Indicator Lamp Rated Voltage	Mount Hole Size	Ingress Protection Rating
Code	Action Type							
With Lights ZHC42	F(Reset) Z(Self-Locking)	F(Flat Head)	11(1NO 1NC) 22(2NO 2NC)	E(Ring) F(Power Logo)	R(Red) G(Green) Y(Yellow) B(Blue) W(White)	A(AC/DC24V) V(AC/DC220V)	Ø19.5	IP67

Performance Characteristics

Contact Resistance	Insulation Resistance	Dielectric Strength	Operating Stroke	Ambient Temperature	Mechanical Life	Electrical Life
< 20mΩ	> 1000MΩ	2000VAC	About 1.5mm	-20°C ~ +55°C	Operating Part: More Than 100,000 Times Reset Part: More Than 1,000,000 Times	More Than 200,000 Times



Part Number		Button Shape	Contact Type	Light Type	Light Color	Indicator Lamp Rated Voltage
Code	Action Type					
With Lights ZHC42	Z(Self-Locking) F(Reset)	F(Flat Head)	11(1NO 1NC) 22(2NO 2NC)	E(Ring) F(Power Logo)	B(Blue) W(White)	A(AC/DC24V) V(AC/DC220V)

ZHC42 — F — F — 22 — F — W — V